

Sechskant-Bohrschrauben


mit Längsschlitz - angepreßter Bund

Hexagon washer head self drilling screws

with slot

Vis autoforeuse-tête hexagonale

avec fente - embase cylindrique

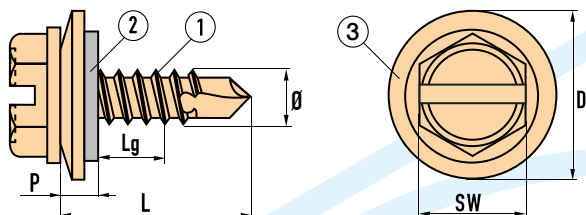

Stahl verzinkt **GOEBEL silber GL**
 Steel zinc plated **GOEBEL silver GL**
 Acier zingué **GOEBEL GL argenté**

- ① EPDM
- ② EPDM
- ③ A2 W.-Nr. 1.4301/03 AISI 305


Ø 4,2 mm

SW = 7 mm





P = 3,0 mm

D = 12,0 mm

→ = C



UPM / RPM / TR-MN = 1800 - 2500

	Lg min			
4,2 x 13 mm	2,8 mm	7 mm	500	40203 42 130
4,2 x 16 mm	5,8 mm	7 mm	500	40203 42 160
4,2 x 19 mm	8,8 mm	7 mm	500	40203 42 190
4,2 x 22 mm	11,8 mm	7 mm	250	40203 42 220
4,2 x 25 mm	14,8 mm	7 mm	250	40203 42 250
4,2 x 32 mm	21,5 mm	7 mm	250	40203 42 320
4,2 x 38 mm	27,5 mm	7 mm	250	40203 42 380


Ø 4,8 mm

SW = 8 mm





P = 3,0 mm

D = 12,0 mm

→ = C



UPM / RPM / TR-MN = 1800 - 2500

	Lg min			
4,8 x 13 mm	2,2 mm	8 mm	500	40203 48 130
4,8 x 16 mm	4,3 mm	8 mm	500	40203 48 160
4,8 x 19 mm	7,2 mm	8 mm	500	40203 48 190
4,8 x 22 mm	10,2 mm	8 mm	250	40203 48 220
4,8 x 25 mm	13,2 mm	8 mm	250	40203 48 250
4,8 x 32 mm	20,0 mm	8 mm	250	40203 48 320
4,8 x 38 mm	26,0 mm	8 mm	250	40203 48 380

Ø 5,5 mm

SW = 8 mm





P = 3,0 mm

D = 16,0 mm

→ = C



UPM / RPM / TR-MN = 1000 - 1800

	Lg min			
5,5 x 19 mm	6,5 mm	8 mm	500	40203 55 190
5,5 x 25 mm	12,5 mm	8 mm	500	40203 55 250


Ø 6,3 mm

SW = 10 mm





P = 3,0 mm

D = 16,0 mm

→ = C



UPM / RPM / TR-MN = 1000-1800

	Lg min			
6,3 x 19 mm	5,5 mm	10 mm	500	40203 63 190
6,3 x 25 mm	11,5 mm	10 mm	500	40203 63 250