

DIN 7504 L

SECHSKANT-BOHRSCHRAUBEN

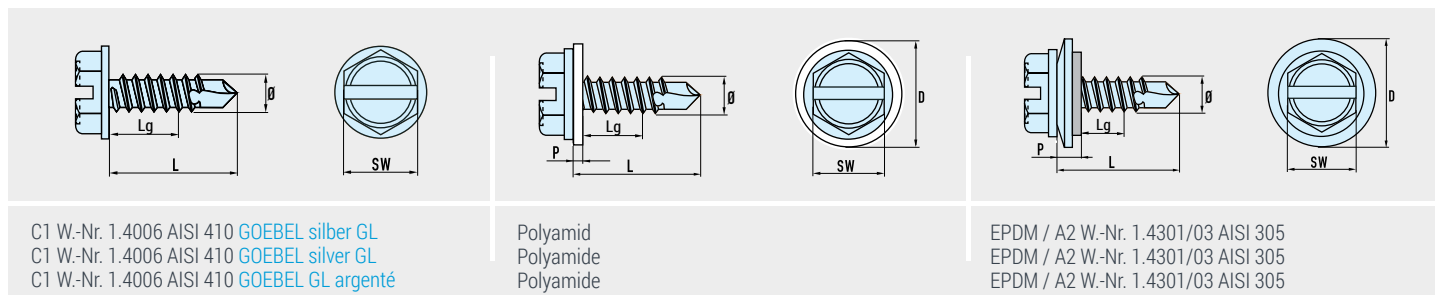
MIT LÄNGSSCHLITZ - ANGEPRESSTER BUND

HEXAGON WASHER HEAD SELF DRILLING SCREWS

WITH SLOT

VIS AUTOFOREUSE-TÊTE HEXAGONALE

AVEC FENTE - EMBASE CYLINDRIQUE



C1 W.-Nr. 1.4006 AISI 410 [GOEBEL silber GL](#)
 C1 W.-Nr. 1.4006 AISI 410 [GOEBEL silver GL](#)
 C1 W.-Nr. 1.4006 AISI 410 [GOEBEL GL argenté](#)

Polyamid
 Polyamide
 Polyamide






EPDM / A2 W.-Nr. 1.4301/03 AISI 305
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305

Ø 4,2 mm

SW = 7 mm



UPM/RPM/TR-MIN = max. 1200

|   |  | | | |  | | | |  | | | | |
|--|---|---|-----------------------------|--------|---|--------|--|-----------------------------|---|---------|--------|---|-----------------------------|
| | LG min |  | CODE | P | D | LG min |  | CODE | P | D | LG min |  | CODE |
| 4,2 x 13 mm | 4,3 mm | 1000 | 40661 42130 | 2,0 mm | 10,0 mm | 3,3 mm | 1000 | 40622 42130 | 3,0 mm | 12,0 mm | 2,8 mm | 500 | 40624 42130 |
| 4,2 x 16 mm | 7,3 mm | 1000 | 40661 42160 | 2,0 mm | 10,0 mm | 6,3 mm | 500 | 40622 42160 | 3,0 mm | 12,0 mm | 5,8 mm | 500 | 40624 42160 |
| 4,2 x 19 mm | 10,3 mm | 1000 | 40611 42190 | 2,0 mm | 10,0 mm | 9,3 mm | 500 | 40622 42190 | 3,0 mm | 12,0 mm | 8,8 mm | 500 | 40624 42190 |




Ø 4,8 mm

SW = 8 mm



UPM/RPM/TR-MIN = max. 1200

| | | | | | | | | | | | | | |
|-------------|---------|-----|-----------------------------|--------|---------|---------|-----|-----------------------------|--------|---------|---------|-----|-----------------------------|
| 4,8 x 16 mm | 5,8 mm | 500 | 40661 48160 | 2,0 mm | 10,0 mm | 4,8 mm | 500 | 40622 48160 | 3,0 mm | 12,0 mm | 4,3 mm | 500 | 40624 48160 |
| 4,8 x 19 mm | 8,7 mm | 500 | 40661 48190 | 2,0 mm | 10,0 mm | 7,7 mm | 500 | 40622 48190 | 3,0 mm | 12,0 mm | 7,2 mm | 500 | 40624 48190 |
| 4,8 x 25 mm | 14,7 mm | 500 | 40661 48250 | 2,0 mm | 10,0 mm | 13,7 mm | 500 | 40622 48250 | 3,0 mm | 12,0 mm | 13,2 mm | 500 | 40624 48250 |

|  |  |  |
|--|---|---|
| 4,2 x 13 mm | 2 x 0,8 mm | max. 3,0 mm |
| 4,2 x 16 mm | 2 x 0,8 mm | max. 3,0 mm |
| 4,2 x 19 mm | 2 x 0,8 mm | max. 3,0 mm |
| 4,8 x 16 mm | 2 x 1,0 mm | max. 4,4 mm |
| 4,8 x 19 mm | 2 x 1,0 mm | max. 4,4 mm |
| 4,8 x 25 mm | 2 x 1,0 mm | max. 4,4 mm |