


SECHSKANT-BOHRSCHRAUBEN

ANGEPRESSTER BUND

HEXAGON WASHER HEAD SELF DRILLING SCREWS

VIS AUTOFREUSE-TÊTE HEXAGONALE

EMBASSE CYLINDRIQUE

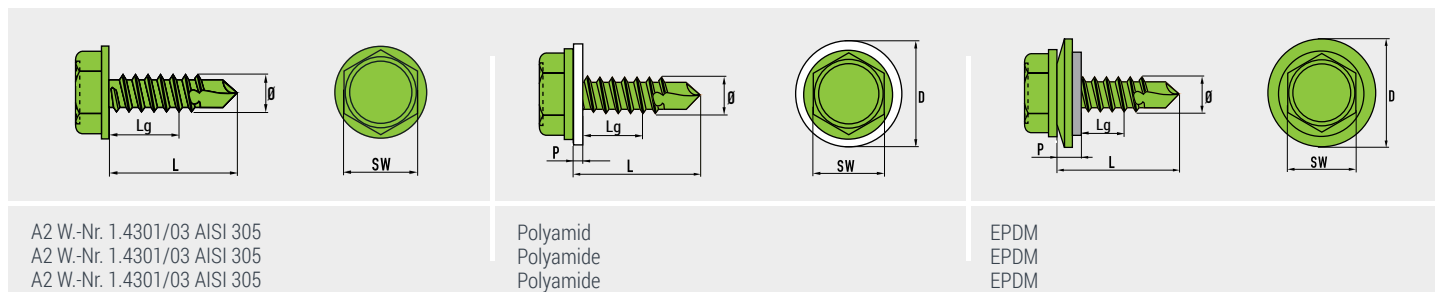

Ø	L	LG min	CODE	P	D	LG min	CODE	P	D	LG min	CODE
Ø 4,2 mm SW = 7 mm = C = max. 3,0 mm UPM/RPM/TR-MIN = 1800 - 2500	4,2 x 13 mm	4,3 mm	1000 77710 42130	2,0 mm	10,0 mm	3,3 mm	1000 79901 42130	3,0 mm	12,0 mm	2,8 mm	500 79900 42130
	4,2 x 16 mm	7,3 mm	1000 77710 42160	2,0 mm	10,0 mm	6,3 mm	500 79901 42160	3,0 mm	12,0 mm	5,8 mm	500 79900 42160
	4,2 x 19 mm	10,3 mm	1000 77710 42190	2,0 mm	10,0 mm	9,3 mm	500 79901 42190	3,0 mm	12,0 mm	8,8 mm	500 79900 42190
	4,2 x 25 mm	16,3 mm	500 77710 42250	2,0 mm	10,0 mm	15,3 mm	500 79901 42250	3,0 mm	12,0 mm	14,8 mm	250 79900 42250
	4,2 x 32 mm	23,0 mm	500 77710 42320	2,0 mm	10,0 mm	22,0 mm	250 79901 42320	3,0 mm	12,0 mm	21,5 mm	250 79900 42320
	4,2 x 38 mm	29,0 mm	500 77710 42380	2,0 mm	10,0 mm	28,0 mm	250 79901 42380	3,0 mm	12,0 mm	27,5 mm	250 79900 42380
	Ø 4,8 mm SW = 8 mm = C = max. 4,4 mm UPM/RPM/TR-MIN = 1800 - 2500	4,8 x 13 mm	3,7 mm	1000 77710 48130	2,0 mm	10,0 mm	2,7 mm	1000 79901 48130	3,0 mm	12,0 mm	2,2 mm
4,8 x 16 mm		5,8 mm	1000 77710 48160	2,0 mm	10,0 mm	4,8 mm	500 79901 48160	3,0 mm	12,0 mm	4,3 mm	500 79900 48160
4,8 x 19 mm		8,7 mm	1000 77710 48190	2,0 mm	10,0 mm	7,7 mm	500 79901 48190	3,0 mm	12,0 mm	7,2 mm	500 79900 48190
4,8 x 25 mm		14,7 mm	500 77710 48250	2,0 mm	10,0 mm	13,7 mm	250 79901 48250	3,0 mm	12,0 mm	13,2 mm	250 79900 48250
4,8 x 32 mm		21,5 mm	500 77710 48320	2,0 mm	10,0 mm	20,5 mm	250 79901 48320	3,0 mm	12,0 mm	20,0 mm	250 79900 48320
4,8 x 38 mm		27,5 mm	250 77710 48380	2,0 mm	10,0 mm	26,5 mm	250 79901 48380	3,0 mm	12,0 mm	26,0 mm	250 79900 48380
4,8 x 45 mm		34,5 mm	250 77710 48450	2,0 mm	10,0 mm	33,5 mm	250 79901 48450	3,0 mm	12,0 mm	33,0 mm	250 79900 48450
Ø 5,5 mm SW = 8 mm = C = max. 5,25 mm UPM/RPM/TR-MIN = 1000 - 1800	5,5 x 19 mm	8,0 mm	250 77710 55190	2,0 mm	11,0 mm	7,0 mm	500 79901 55190	3,0 mm	16,0 mm	6,5 mm	500 79916 55190
	5,5 x 32 mm	21,0 mm	250 77710 55320	2,0 mm	11,0 mm	20,0 mm	250 79901 55320	3,0 mm	16,0 mm	19,5 mm	500 79916 55320
	5,5 x 38 mm	27,0 mm	250 77710 55380	2,0 mm	11,0 mm	26,0 mm	250 79901 55380	3,0 mm	16,0 mm	25,5 mm	500 79916 55380
	5,5 x 45 mm	34,0 mm	250 77710 55450	2,0 mm	11,0 mm	33,0 mm	250 79901 55450	3,0 mm	16,0 mm	32,5 mm	500 79916 55450
	5,5 x 50 mm	39,0 mm	250 77710 55500	2,0 mm	11,0 mm	38,0 mm	250 79901 55500	3,0 mm	16,0 mm	37,5 mm	500 79916 55500
	Ø 6,3 mm SW = 10 mm = C = max. 6,0 mm UPM/RPM/TR-MIN = 1000 - 1800	6,3 x 19 mm	7,0 mm	500 77710 63190	2,0 mm	15,5 mm	6,0 mm	500 79901 63190	3,0 mm	16,0 mm	5,5 mm
6,3 x 25 mm		13,0 mm	500 77710 63250	2,0 mm	15,5 mm	12,0 mm	500 79901 63250	3,0 mm	16,0 mm	11,5 mm	500 79915 63250
6,3 x 32 mm		20,0 mm	500 77710 63320	2,0 mm	15,5 mm	19,0 mm	250 79901 63320	3,0 mm	16,0 mm	18,5 mm	500 79900 63320
6,3 x 38 mm		26,0 mm	500 77710 63380	2,0 mm	15,5 mm	25,0 mm	250 79901 63380	3,0 mm	16,0 mm	24,5 mm	250 79900 63380
6,3 x 45 mm		33,0 mm	500 77710 63450	2,0 mm	15,5 mm	32,0 mm	250 79901 63450	3,0 mm	16,0 mm	31,5 mm	250 79900 63450
6,3 x 50 mm		38,0 mm	500 77710 63500	2,0 mm	15,5 mm	37,0 mm	250 79901 63500	3,0 mm	16,0 mm	36,5 mm	250 79915 63500