

DICHT-BECHERBLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15973)

SEALED BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15973)

RIVETS ÉTANCHES

TÊTE PLATE (~ DIN EN ISO 15973)

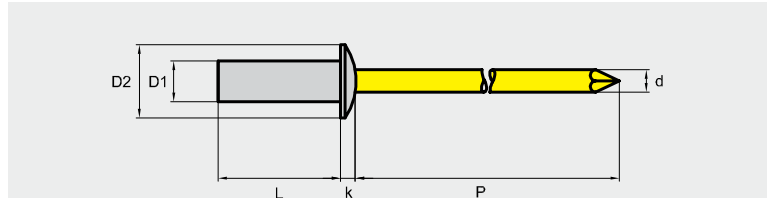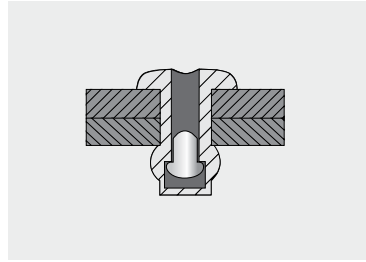

Aluminium AIMG 5
Aluminium AIMG 5
Aluminium AIMG 5

Stahl leicht gefettet
Steel protection layer
Acier légèrement graissé

Ø 3,2 mm

D1 = 3,2 +/- 0,08 mm
D2 = 6,0 +/- 0,24 mm
k = ≤ 1,4 mm
d = 1,7 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
→ 3,3 mm

D1	Head Diameter	Head Length	CODE	Head Thickness	Head Diameter	Head Length	Head Diameter	Head Length
3,2 x 6,5 mm	0,5 - 2,0 mm	21701 32600	1070 N	1245 N	1000	10000	1000	10000
3,2 x 8,0 mm	2,0 - 3,5 mm	21701 32800						
3,2 x 9,5 mm	3,5 - 5,0 mm	21701 32900						
3,2 x 10,5 mm	5,0 - 6,5 mm	21701 32100						
3,2 x 12,5 mm	6,5 - 8,0 mm	21701 32120						

Ø 4,0 mm

D1 = 4,0 +/- 0,08 mm
D2 = 8,0 +/- 0,29 mm
k = ≤ 1,7 mm
d = 2,18 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
→ 4,1 mm

D1	Head Diameter	Head Length	CODE	Head Thickness	Head Diameter	Head Length	Head Diameter	Head Length
4,0 x 8,0 mm	0,5 - 3,5 mm	21701 40800	1710 N	2240 N	1000	10000	500	5000
4,0 x 9,5 mm	3,5 - 4,5 mm	21701 40950						
4,0 x 11,0 mm	4,5 - 6,5 mm	21701 40110						
4,0 x 12,0 mm	6,5 - 8,0 mm	21701 40120						
4,0 x 15,0 mm	8,0 - 10,5 mm	21701 40150						

Ø 4,8 mm

D1 = 4,8 +/- 0,08 mm
D2 = 9,5 +/- 0,29 mm
k = ≤ 2,0 mm
d = 2,63 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
→ 4,9 mm

D1	Head Diameter	Head Length	CODE	Head Thickness	Head Diameter	Head Length	Head Diameter	Head Length
4,8 x 8,0 mm	1,0 - 3,0 mm	21701 48800	2230 N	3070 N	500	5000	250	2500
4,8 x 9,5 mm	3,0 - 4,5 mm	21701 48950						
4,8 x 10,0 mm	3,5 - 5,0 mm	21701 48100						
4,8 x 11,0 mm	4,5 - 6,0 mm	21701 48110						
4,8 x 12,5 mm	6,0 - 7,5 mm	21701 48125						
4,8 x 14,0 mm	7,5 - 9,0 mm	21701 48140						
4,8 x 16,0 mm	9,0 - 11,0 mm	21701 48160						
4,8 x 18,0 mm	11,0 - 13,0 mm	21701 48180						
4,8 x 21,0 mm	13,0 - 16,0 mm	21701 48210						
4,8 x 25,0 mm	16,0 - 20,0 mm	21701 48250						

Ø 6,4 mm

D1 = 6,4 +/- 0,11 mm
D2 = 12,7 +/- 0,35 mm
k = ≤ 2,5 mm
d = 3,7 mm
P ≥ 31,0 mm
L = + 1,0 / - 0,2 mm
→ 6,5 mm

D1	Head Diameter	Head Length	CODE	Head Thickness	Head Diameter	Head Length	Head Diameter	Head Length
6,4 x 12,5 mm	3,0 - 6,0 mm	21701 64125	3950 N	5000 N	250	2500	250	2500
6,4 x 16,0 mm	6,0 - 9,0 mm	21701 64160						