

DIN 7504 L

SECHSKANT-BOHRSCHRAUBEN


MIT LÄNGSSCHLITZ - ANGEPRESSTER BUND

HEXAGON WASHER HEAD SELF DRILLING SCREWS

WITH SLOT

VIS AUTOFOREUSE-TÊTE HEXAGONALE

AVEC FENTE - EMBASE CYLINDRIQUE

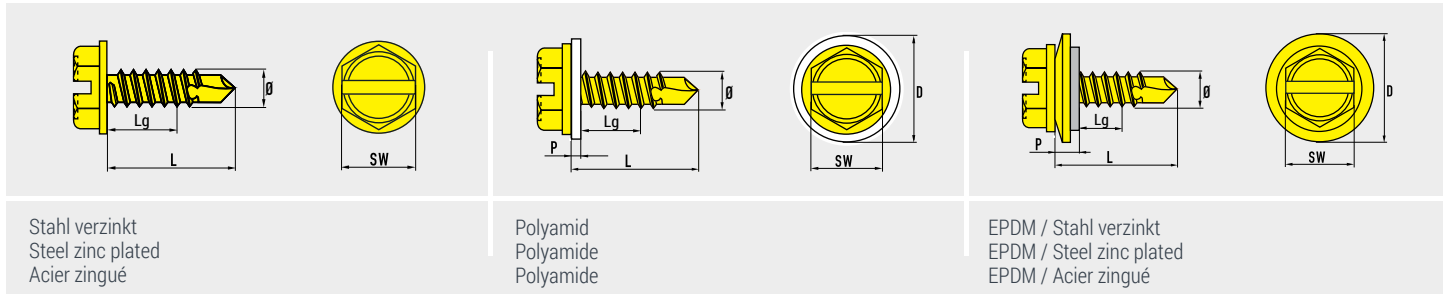

Stahl verzinkt
Steel zinc plated
Acier zingué

Polyamid
Polyamide
Polyamide

EPDM / Stahl verzinkt
EPDM / Steel zinc plated
EPDM / Acier zingué

Ø 4,2 mm

SW = 7 mm

= C

= max. 3,0 mm

UPM/RPM/TR-MIN = 1800 - 2500

| Ø | L x Lg | LG min | CODE | P | D | LG min | CODE | P | D | LG min | CODE |
|-----|--------|---------|------------------|--------|---------|---------|------------------|--------|---------|---------|-----------------|
| | | | | | | | | | | | |
| 4,2 | 13 mm | 4,3 mm | 1000 40101 42130 | 2,0 mm | 10,0 mm | 3,3 mm | 1000 40102 42130 | 3,0 mm | 12,0 mm | 2,8 mm | 500 40103 42130 |
| | 16 mm | 7,3 mm | 1000 40101 42160 | 2,0 mm | 10,0 mm | 6,3 mm | 500 40102 42160 | 3,0 mm | 12,0 mm | 5,8 mm | 500 40103 42160 |
| | 19 mm | 10,3 mm | 1000 40101 42190 | 2,0 mm | 10,0 mm | 9,3 mm | 500 40102 42190 | 3,0 mm | 12,0 mm | 8,8 mm | 500 40103 42190 |
| | 22 mm | 13,3 mm | 500 40101 42220 | 2,0 mm | 10,0 mm | 12,3 mm | 500 40112 42220 | 3,0 mm | 12,0 mm | 11,8 mm | 250 40103 42220 |
| | 25 mm | 16,3 mm | 500 40101 42250 | 2,0 mm | 10,0 mm | 15,3 mm | 500 40112 42250 | 3,0 mm | 12,0 mm | 14,8 mm | 250 40103 42250 |
| | 32 mm | 23,0 mm | 500 40101 42320 | 2,0 mm | 10,0 mm | 22,0 mm | 250 40112 42320 | 3,0 mm | 12,0 mm | 21,5 mm | 250 40103 42320 |
| | 38 mm | 29,0 mm | 500 40101 42380 | 2,0 mm | 10,0 mm | 28,0 mm | 250 40112 42380 | 3,0 mm | 12,0 mm | 27,5 mm | 250 40103 42380 |

Ø 4,8 mm

SW = 8 mm

= C

= max. 4,4 mm

UPM/RPM/TR-MIN = 1800 - 2500

| | | | | | | | | | | | |
|-----|-------|---------|------------------|--------|---------|---------|------------------|--------|---------|---------|-----------------|
| 4,8 | 13 mm | 3,7 mm | 1000 40101 48130 | 2,0 mm | 10,0 mm | 2,7 mm | 1000 40112 48130 | 3,0 mm | 12,0 mm | 2,2 mm | 500 40103 48130 |
| | 16 mm | 5,8 mm | 1000 40101 48160 | 2,0 mm | 10,0 mm | 4,8 mm | 500 40112 48160 | 3,0 mm | 12,0 mm | 4,3 mm | 500 40103 48160 |
| | 19 mm | 8,7 mm | 1000 40101 48190 | 2,0 mm | 10,0 mm | 7,7 mm | 500 40112 48190 | 3,0 mm | 12,0 mm | 7,2 mm | 500 40103 48190 |
| | 22 mm | 11,7 mm | 500 40101 48220 | 2,0 mm | 10,0 mm | 10,7 mm | 250 40112 48220 | 3,0 mm | 12,0 mm | 10,2 mm | 250 40103 48220 |
| | 25 mm | 14,7 mm | 500 40101 48250 | 2,0 mm | 10,0 mm | 13,7 mm | 250 40112 48250 | 3,0 mm | 12,0 mm | 13,2 mm | 250 40103 48250 |
| | 32 mm | 21,5 mm | 500 40101 48320 | 2,0 mm | 10,0 mm | 20,5 mm | 250 40112 48320 | 3,0 mm | 12,0 mm | 20,0 mm | 250 40103 48320 |
| | 38 mm | 27,5 mm | 250 40101 48380 | 2,0 mm | 10,0 mm | 26,5 mm | 250 40112 48380 | 3,0 mm | 12,0 mm | 26,0 mm | 250 40103 48380 |

Ø 5,5 mm

SW = 8 mm

= C

= max. 5,25 mm

UPM/RPM/TR-MIN = 1000 - 1800

| | | | | | | | | | | | |
|-----|-------|---------|-----------------|--------|---------|---------|-----------------|--------|---------|---------|-----------------|
| 5,5 | 19 mm | 8,0 mm | 500 40101 55190 | 2,0 mm | 11,0 mm | 7,0 mm | 500 40112 55190 | 3,0 mm | 16,0 mm | 6,5 mm | 500 40103 55190 |
| | 25 mm | 14,0 mm | 500 40101 55250 | 2,0 mm | 11,0 mm | 13,0 mm | 500 40112 55250 | 3,0 mm | 16,0 mm | 12,5 mm | 500 40103 55250 |

Ø 6,3 mm

SW = 10 mm

= C

= max. 6,0 mm

UPM/RPM/TR-MIN = 1000 - 1800

| | | | | | | | | | | | |
|-----|-------|---------|-----------------|--------|---------|---------|-----------------|--------|---------|---------|-----------------|
| 6,3 | 19 mm | 7,0 mm | 500 40101 63190 | 2,0 mm | 15,5 mm | 6,0 mm | 500 40112 63191 | 3,0 mm | 16,0 mm | 5,5 mm | 500 40103 63190 |
| | 25 mm | 13,0 mm | 500 40101 63250 | 2,0 mm | 15,5 mm | 12,0 mm | 500 40112 63251 | 3,0 mm | 16,0 mm | 11,5 mm | 500 40103 63250 |

Änderungen vorbehalten Subject to modifications Sous réserve de modifications