

DIN 7504 L

SECHSKANT-BOHRSCHRAUBEN


MIT LÄNGSSCHLITZ - ANGEPRESSTER BUND

HEXAGON WASHER HEAD SELF DRILLING SCREWS

WITH SLOT

VIS AUTOFOREUSE-TÊTE HEXAGONALE

AVEC FENTE - EMBASE CYLINDRIQUE

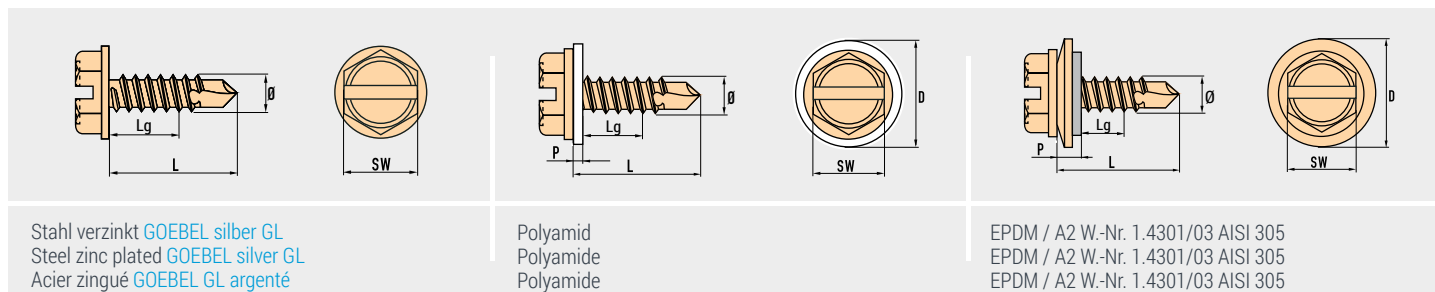

Ø 4,2 mm SW = 7 mm = C = max. 3,0 mm	Ø 4,2 mm				Ø 4,8 mm				Ø 5,5 mm				Ø 6,3 mm														
	LG min	GOEBEL	CODE	P	D	LG min	GOEBEL	CODE	P	D	LG min	GOEBEL	CODE	P	D	LG min	GOEBEL	CODE									
4,2 x 13 mm	4,3 mm	1000	40201 42130	2,0 mm	10,0 mm	3,3 mm	1000	40202 42130	3,0 mm	12,0 mm	2,8 mm	500	40203 42130	7,0 mm	500	40201 63190	2,0 mm	15,5 mm	6,0 mm	500	40202 63190	3,0 mm	16,0 mm	5,5 mm	500	40203 63190	
4,2 x 16 mm	7,3 mm	1000	40201 42160	2,0 mm	10,0 mm	6,3 mm	500	40202 42160	3,0 mm	12,0 mm	5,8 mm	500	40203 42160	6,3 x 19 mm	13,0 mm	500	40201 63250	2,0 mm	15,5 mm	12,0 mm	500	40202 63250	3,0 mm	16,0 mm	11,5 mm	500	40203 63250
4,2 x 19 mm	10,3 mm	1000	40201 42190	2,0 mm	10,0 mm	9,3 mm	500	40202 42190	3,0 mm	12,0 mm	8,8 mm	500	40203 42190	5,5 x 19 mm	8,0 mm	500	40201 55190	2,0 mm	11,0 mm	7,0 mm	500	40202 55190	3,0 mm	16,0 mm	6,5 mm	500	40203 55190
4,2 x 25 mm	16,3 mm	500	40201 42250	2,0 mm	10,0 mm	15,3 mm	500	40202 42250	3,0 mm	12,0 mm	14,8 mm	250	40203 42250	5,5 x 25 mm	14,0 mm	500	40201 55250	2,0 mm	11,0 mm	13,0 mm	500	40202 55250	3,0 mm	16,0 mm	12,5 mm	500	40203 55250

UPM/RPM/TR-MIN = 1800 - 2500

Ø 4,8 mm

SW = 8 mm

= C

= max. 4,4 mm

UPM/RPM/TR-MIN = 1800 - 2500

Ø 5,5 mm

SW = 8 mm

= C

= max. 5,25 mm

UPM/RPM/TR-MIN = 1000 - 1800

Ø 6,3 mm

SW = 10 mm

= C

= max. 6,0 mm

UPM/RPM/TR-MIN = 1000 - 1800

Änderungen vorbehalten Subject to modifications Sous réserve de modifications