


SECHSKANT-BOHRSCHRAUBEN

ANGEPRESSTER BUND

HEXAGON WASHER HEAD SELF DRILLING SCREWS

VIS AUTOFOREUSE-TÊTE HEXAGONALE

EMBASE CYLINDRIQUE

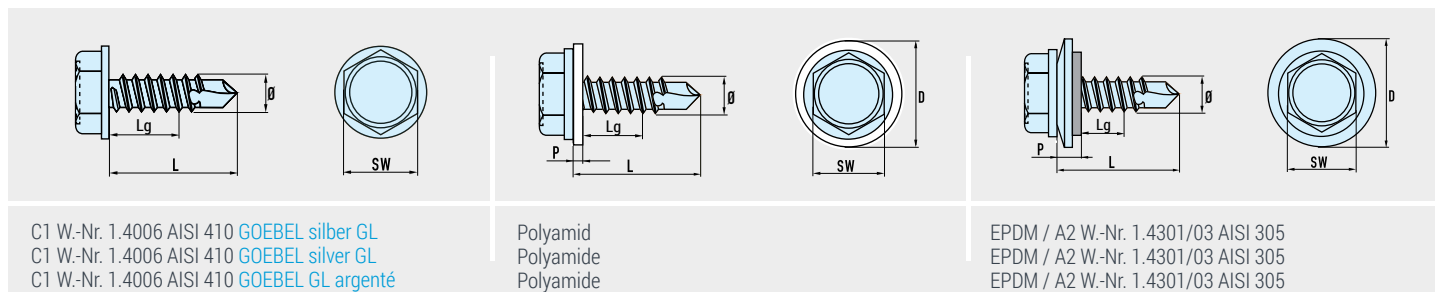

Ø 4,2 mm	*4,2 x 13 mm	4,3 mm	1000	40601 42130	2,0 mm	10,0 mm	3,3 mm	500	40602 42130	3,0 mm	12,0 mm	2,8 mm	500	40604 42130
SW = *1/4" / 7 mm	4,2 x 13 mm	4,3 mm	1000	47671 42130	2,0 mm	10,0 mm	3,3 mm	500	47672 42130	3,0 mm	12,0 mm	2,8 mm	500	47674 42130
UPM/RPM/TR-MIN = max. 1200	*4,2 x 19 mm	10,3 mm	1000	40601 42190	2,0 mm	10,0 mm	9,3 mm	500	40602 42190	3,0 mm	12,0 mm	8,8 mm	500	40604 42190
	4,2 x 19 mm	10,3 mm	1000	47671 42190	2,0 mm	10,0 mm	9,3 mm	500	47672 42190	3,0 mm	12,0 mm	8,8 mm	500	47674 42190

Ø 4,8 mm	4,8 x 16 mm	5,8 mm	500	40601 48160	2,0 mm	10,0 mm	4,8 mm	500	40602 48160	3,0 mm	12,0 mm	4,3 mm	500	40604 48160
SW = 8 mm	4,8 x 19 mm	8,7 mm	500	40601 48190	2,0 mm	10,0 mm	7,7 mm	500	40602 48190	3,0 mm	12,0 mm	7,2 mm	500	40604 48190
UPM/RPM/TR-MIN = max. 1200	4,8 x 25 mm	14,7 mm	500	40601 48250	2,0 mm	10,0 mm	13,7 mm	500	40602 48250	3,0 mm	12,0 mm	13,2 mm	250	40604 48250

Ø 6,3 mm	6,3 x 19 mm	7,0 mm	500	40601 63190	2,0 mm	15,5 mm	6,0 mm	250	40602 63190	3,0 mm	16,0 mm	5,5 mm	250	40604 63190
SW = 3/8"	6,3 x 25 mm	13,0 mm	500	40601 63250	2,0 mm	15,5 mm	12,0 mm	250	40602 63250	3,0 mm	16,0 mm	11,5 mm	250	40604 63250
UPM/RPM/TR-MIN = max. 1200														

	A2/A4	Stahl Steel Acier
4,2 x 13 mm	2 x 0,8 mm	max. 3,0 mm
4,2 x 19 mm	2 x 0,8 mm	max. 3,0 mm
4,8 x 16 mm	2 x 1,0 mm	max. 4,4 mm
4,8 x 19 mm	2 x 1,0 mm	max. 4,4 mm
4,8 x 25 mm	2 x 1,0 mm	max. 4,4 mm
6,3 x 19 mm	2 x 2,0 mm	max. 6,0 mm
6,3 x 25 mm	2 x 2,0 mm	max. 6,0 mm