

DIN 7504 SQ

LINSENKOPF-BOHRSCHRAUBEN (SQ)

MIT INNENVIERKANT

PAN HEAD SELF DRILLING SCREWS (SQ)


WITH SQUARE SOCKET IN HEAD

VIS AUTOFOREUSE-TÊTE CYLINDRIQUE BOMBÉE (SQ)

EMPREINTE CARRÉE



Inklusive
including
inclusive

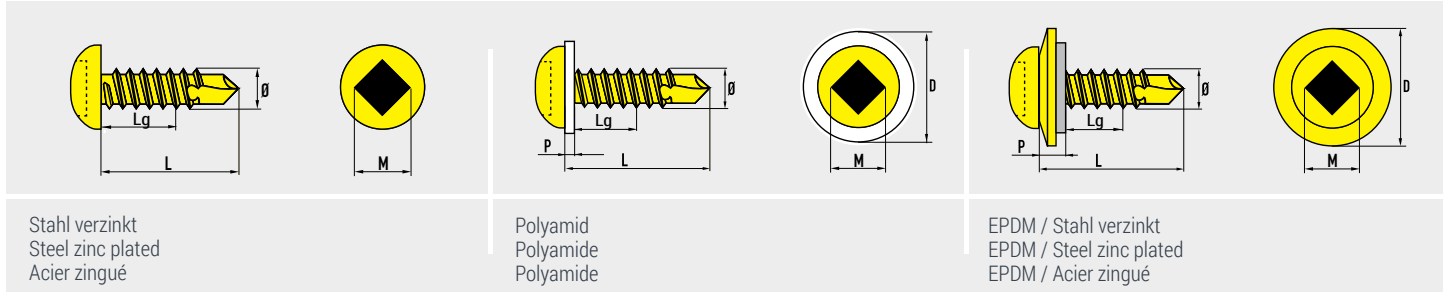

Stahl verzinkt
Steel zinc plated
Acier zingué

Polyamid
Polyamide
Polyamide

EPDM / Stahl verzinkt
EPDM / Steel zinc plated
EPDM / Acier zingué

Ø 4,2 mm

M = No. 2

= C

= max. 3,0 mm

UPM/RPM/TR-MIN = 1800 - 2500

	LG min		CODE	P	D	LG min		CODE	P	D	LG min		CODE	
	4,2 x 13 mm	4,3 mm	1000	41801 42130	2,0 mm	10,0 mm	3,3 mm	1000	41802 42130	3,0 mm	12,0 mm	2,8 mm	500	41803 42130
	4,2 x 16 mm	7,3 mm	1000	41801 42160	2,0 mm	10,0 mm	6,3 mm	500	41802 42160	3,0 mm	12,0 mm	5,8 mm	500	41803 42160
	4,2 x 19 mm	10,3 mm	1000	41801 42190	2,0 mm	10,0 mm	9,3 mm	500	41802 42190	3,0 mm	12,0 mm	8,8 mm	500	41803 42190
	4,2 x 25 mm	16,3 mm	500	41801 42250	2,0 mm	10,0 mm	15,3 mm	500	41802 42250	3,0 mm	12,0 mm	14,8 mm	250	41803 42250
	4,2 x 32 mm	23,0 mm	500	41801 42320	2,0 mm	10,0 mm	22,0 mm	500	41802 42320	3,0 mm	12,0 mm	21,5 mm	250	41803 42320
	4,2 x 38 mm	29,0 mm	500	41801 42380	2,0 mm	10,0 mm	28,0 mm	500	41802 42380	3,0 mm	12,0 mm	27,5 mm	250	41803 42380

Ø 4,8 mm

M = No. 2

= C

= max. 4,4 mm

UPM/RPM/TR-MIN = 1800 - 2500

	4,8 x 13 mm	3,7 mm	1000	41801 48130	2,0 mm	10,0 mm	2,7 mm	500	41802 48130	3,0 mm	12,0 mm	2,2 mm	500	41803 48130
	4,8 x 16 mm	5,8 mm	1000	41801 48160	2,0 mm	10,0 mm	4,8 mm	500	41802 48160	3,0 mm	12,0 mm	4,3 mm	500	41803 48160
	4,8 x 19 mm	8,7 mm	1000	41801 48190	2,0 mm	10,0 mm	7,7 mm	500	41802 48190	3,0 mm	12,0 mm	7,2 mm	500	41803 48190
	4,8 x 25 mm	14,7 mm	500	41801 48250	2,0 mm	10,0 mm	13,7 mm	500	41802 48250	3,0 mm	12,0 mm	13,2 mm	250	41803 48250
	4,8 x 32 mm	21,5 mm	500	41801 48320	2,0 mm	10,0 mm	20,5 mm	500	41802 48320	3,0 mm	12,0 mm	20,0 mm	250	41803 48320
	4,8 x 38 mm	27,5 mm	250	41801 48380	2,0 mm	10,0 mm	26,5 mm	500	41802 48380	3,0 mm	12,0 mm	26,0 mm	250	41803 48380