

DIN 7504 M

LINSENKOPF-BOHRSCHRAUBEN


MIT KREUZSCHLITZ (H-PHILLIPS) - GEHÄRTETE BOHRSPITZE

PAN HEAD SELF DRILLING SCREWS

WITH CROSS RECESSED (H-PHILLIPS) - WITH HARDENED DRILLING POINT

VIS AUTOFREUSE-TÊTE CYLINDRIQUE BOMBÉE

EMPREINTE CRUCIFORME (H-PHILLIPS) - POINTE FOREUSE RENFORCÉE

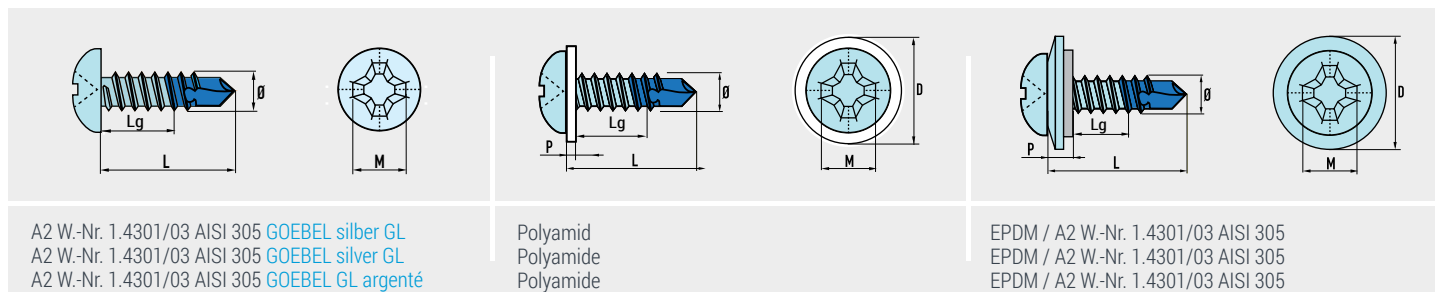

A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silber GL
 A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silver GL
 A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL GL argenté

Polyamid
 Polyamide
 Polyamide

EPDM / A2 W.-Nr. 1.4301/03 AISI 305
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305

Ø 4,2 mm

M = No. 2



UPM/RPM/TR-MIN = max. 1200

Ø	L	LG min	CODE	P	D	LG min	CODE	P	D	LG min	CODE
4,2	16	7,0	77710 42160	2,0	10,0	6,0	79902 42160	3,0	12,0	5,5	79911 42160
	19	8,5	77710 42191	2,0	10,0	7,5	79902 42190	3,0	12,0	7,0	79911 42190

Ø 4,8 mm

M = No. 2



UPM/RPM/TR-MIN = max. 1200

4,8	16	7,0	77711 48160	2,0	10,0	6,0	79902 48160	3,0	12,0	5,5	79911 48160
	19	7,0	77711 48190	2,0	10,0	6,0	79902 48190	3,0	12,0	5,5	79911 48190
	25	13,0	77710 48250	2,0	10,0	12,0	79902 48250	3,0	12,0	11,5	79911 48250

Ø	L	W x H	Material
4,2	16	2 x 0,8	max. 2,5 mm
4,2	19	2 x 0,8	max. 3,2 mm
4,8	16	2 x 1,0	max. 2,5 mm
4,8	19	2 x 1,0	max. 4,5 mm
4,8	25	2 x 1,0	max. 4,5 mm



Die - ausgezeichnete - Lösung zur Verschraubung von Edelstahlblechen.
 The - Award Winning - Solution to the Fastening of Stainless Steel Sheets.
 La solution idéale les fixations de tôles en inox.