

Sechskant-Bohrschrauben


für Sandwich-Profile auf Stahlunterkonstruktion - **gehärtete Bohrspitze**

Hexagon washer head self drilling screws

for sandwich panels on steel construction - **hardened drilling point**

Vis autoforeuse-tête hexagonale

spécial panneau sandwich sur construction metal - **pointe renforcée**

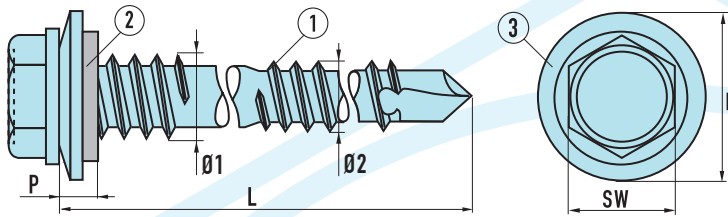

- ① A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL silber GL**
A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL silver GL**
A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL GL argenté**
- ② EPDM
EPDM
EPDM
- ③ A2 W.-Nr. 1.4301/03 AISI 305
A2 W.-Nr. 1.4301/03 AISI 305
A2 W.-Nr. 1.4301/03 AISI 305


Ø1 = 6,3 mm / Ø2 = 5,5 mm

SW = 8 mm

P = 3 mm

D = 16 mm

= C



6,3 / 5,5 x 70 mm	8 mm	22 - 47 mm	100	88910 55 700
6,3 / 5,5 x 85 mm	8 mm	32 - 62 mm	100	88910 55 850
6,3 / 5,5 x 110 mm	8 mm	57 - 87 mm	100	88910 55 110
6,3 / 5,5 x 130 mm	8 mm	77 - 107 mm	100	88910 55 130
6,3 / 5,5 x 150 mm	8 mm	99 - 127 mm	100	88910 55 150
6,3 / 5,5 x 165 mm	8 mm	112 - 142 mm	100	88910 55 165
6,3 / 5,5 x 180 mm	8 mm	127 - 157 mm	100	88910 55 180
6,3 / 5,5 x 200 mm	8 mm	148 - 177 mm	100	88910 55 200
6,3 / 5,5 x 230 mm	8 mm	178 - 207 mm	100	88910 55 230


Ø1 = 6,3 mm / Ø2 = 5,5 mm

SW = 8 mm

P = 3 mm

D = 16 mm

= C

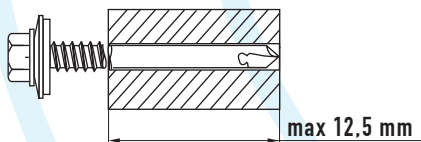

6,3 / 5,5 x 75 mm	8 mm	24 - 35 mm	100	88900 55 750
6,3 / 5,5 x 95 mm	8 mm	28 - 55 mm	100	88900 55 950
6,3 / 5,5 x 125 mm	8 mm	58 - 85 mm	100	88900 55 125
6,3 / 5,5 x 150 mm	8 mm	83 - 110 mm	100	88900 55 150
6,3 / 5,5 x 165 mm	8 mm	98 - 125 mm	100	88900 55 165
6,3 / 5,5 x 185 mm	8 mm	113 - 145 mm	100	88900 55 185
6,3 / 5,5 x 210 mm	8 mm	138 - 170 mm	100	88900 55 210
6,3 / 5,5 x 240 mm	8 mm	168 - 200 mm	100	88900 55 240