

SECHSKANT-BLECHSCHRAUBEN


MIT LÄNGSSCHLITZ - KOPF SCHARFKANTIG ABGEGRATET

HEXAGON HEAD SELF TAPPING SCREWS

WITH SLOT - SHARP SHAPED HEAD

VIS À TÔLE-TÊTE HEXAGONALE

AVEC FENTE - BOUT POINTU

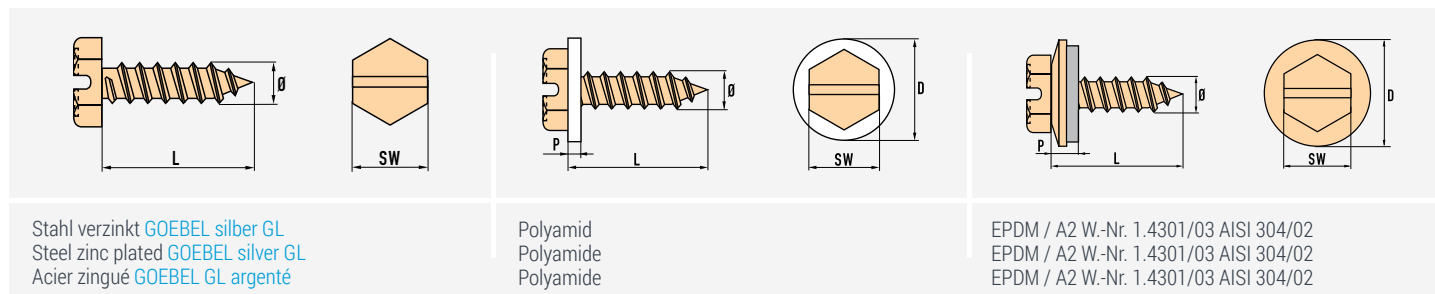

Stahl verzinkt **GOEBEL silver GL**
Steel zinc plated **GOEBEL silver GL**
Acier zingué **GOEBEL GL argenté**

Polyamid
Polyamide
Polyamide

EPDM / A2 W.-Nr. 1.4301/03 AISI 304/02
EPDM / A2 W.-Nr. 1.4301/03 AISI 304/02
EPDM / A2 W.-Nr. 1.4301/03 AISI 304/02

Ø	L	SW	Steel		Polyamide		EPDM		Steel		Polyamide		EPDM		
			CODE	P	D	CODE	P	D	CODE	P	D	CODE	P	D	
Ø 4,2 mm SW = 7 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C	4,2 x 9,5 mm		1000		20201 42950	2,0 mm	10,0 mm	1000		20202 42950	3,0 mm	12,0 mm	500		20203 42950
	4,2 x 13 mm		1000	16000	20201 42130	2,0 mm	10,0 mm	1000	16000	20202 42130	3,0 mm	12,0 mm	500	12000	20203 42130
	4,2 x 16 mm		1000		20201 42160	2,0 mm	10,0 mm	500		20202 42160	3,0 mm	12,0 mm	500	10000	20203 42160
	4,2 x 19 mm		1000		20201 42190	2,0 mm	10,0 mm	500		20202 42190	3,0 mm	12,0 mm	500		20203 42190
	4,2 x 25 mm		500		20201 42250	2,0 mm	10,0 mm	500		20202 42250	3,0 mm	12,0 mm	500		20203 42250
Ø 4,8 mm SW = 8 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C	4,8 x 9,5 mm		1000	16000	20201 48950	2,0 mm	10,0 mm	1000		20202 48950	3,0 mm	12,0 mm	500		20203 48950
	4,8 x 13 mm		1000	12000	20201 48130	2,0 mm	10,0 mm	1000		20202 48130	3,0 mm	12,0 mm	500	10000	20203 48130
	4,8 x 16 mm		1000	12000	20201 48160	2,0 mm	10,0 mm	500	12000	20202 48160	3,0 mm	12,0 mm	500	8000	20203 48160
	4,8 x 19 mm		500	10000	20201 48190	2,0 mm	10,0 mm	500	8000	20202 48190	3,0 mm	12,0 mm	500	8000	20203 48190
	4,8 x 25 mm		500	8000	20201 48250	2,0 mm	10,0 mm	500		20202 48250	3,0 mm	12,0 mm	250	6000	20203 48250
Ø 5,5 mm SW = 8 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C	5,5 x 16 mm		500		20201 55160	2,0 mm	11,0 mm	500		20202 55160	3,0 mm	16,0 mm	250		20203 55160
	5,5 x 19 mm		500		20201 55190	2,0 mm	11,0 mm	500		20202 55190	3,0 mm	16,0 mm	250		20203 55190
	5,5 x 25 mm		500		20201 55250	2,0 mm	11,0 mm	250		20202 55250	3,0 mm	16,0 mm	250		20203 55250
Ø 6,3 mm SW = 10 mm L = 9,5 bis 25,0 mm -0,8 / +0,8 mm = C	6,3 x 16 mm		500		20201 63160	2,0 mm	12,5 mm	500		20202 63160	3,0 mm	16,0 mm	250		20203 63160
	6,3 x 19 mm		500		20201 63190	2,0 mm	12,5 mm	500		20202 63190	3,0 mm	16,0 mm	250		20203 63190
	6,3 x 25 mm		250		20201 63250	2,0 mm	12,5 mm	250		20202 63250	3,0 mm	16,0 mm	250		20203 63250