

DICHT-BECHERBLINDNIETE

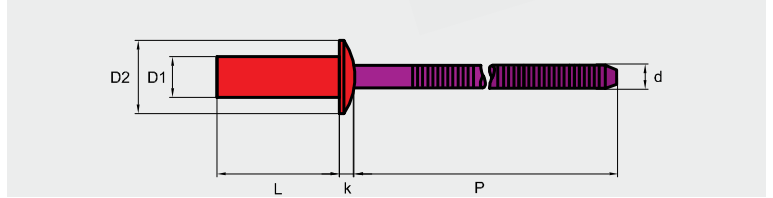
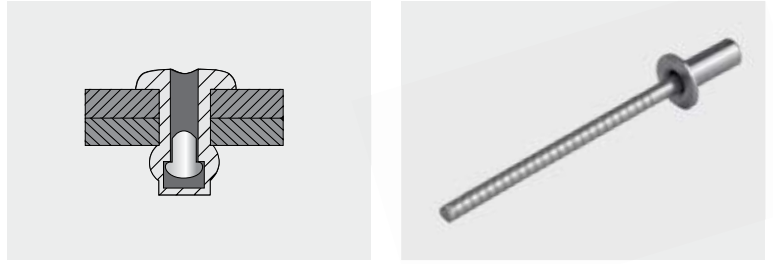
FLACHRUNDKOPF MIT GERILLEM NIETDORN

SEALED BLIND RIVETS

DOMED HEAD WITH GROOVED MANDREL

RIVETS ÉTANCHES


TÊTE PLATE AVEC CLOU CANNÉLÉ










Edelstahl A4 [1.4401]
Stainless steel A4 [AISI 316]
Acier inox A4 [1.4401]


Duplex [1.4462]
Duplex [AISI 318 LN]
Duplex [1.4462]








Ø 3,2 mm

D1 = 3,28 + 0 / - 0,03 mm
D2 = 6,0 + 0,24 / - 0 mm
k = 0,9 + / - 0,3 mm
d = 1,9 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,3 mm


						
3,2 x 6,0 mm	0,5 - 1,5 mm	21501 32600	2000 N	2500 N	1000	10000
3,2 x 8,0 mm	1,5 - 3,0 mm	21501 32800			1000	10000
3,2 x 9,5 mm	3,0 - 5,0 mm	21501 32950			1000	10000
3,2 x 10,0 mm	3,5 - 5,5 mm	21501 32100			1000	10000
3,2 x 12,0 mm	5,0 - 7,0 mm	21501 32120			1000	10000
3,2 x 14,0 mm	7,0 - 9,0 mm	21501 32140			1000	10000
3,2 x 16,0 mm	9,0 - 11,0 mm	21501 32160			1000	10000








Ø 4,0 mm

D1 = 4,08 + 0 / - 0,03 mm
D2 = 8,0 + 0,29 / - 0 mm
k = 1,3 + / - 0,3 mm
d = 2,3 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,1 mm

						
4,0 x 6,0 mm	0,5 - 1,5 mm	21501 40600	3000 N	4000 N	500	5000
4,0 x 8,0 mm	1,5 - 3,0 mm	21501 40800			500	5000
4,0 x 9,5 mm	3,0 - 5,0 mm	21501 40950			500	5000
4,0 x 10,0 mm	3,5 - 5,5 mm	21501 40100			500	5000
4,0 x 12,0 mm	5,0 - 6,5 mm	21501 40120			500	5000
4,0 x 16,0 mm	6,5 - 10,5 mm	21501 40160			500	5000

Ø 4,8 mm

D1 = 4,88 + 0 / - 0,03 mm
D2 = 9,5 + 0,29 / - 0 mm
k = 1,6 + / - 0,3 mm
d = 2,9 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,9 mm

						
4,8 x 8,0 mm	1,0 - 3,0 mm	21501 48800	4500 N	5500 N	250	2500
4,8 x 9,5 mm	3,0 - 5,0 mm	21501 48950			250	2500
4,8 x 10,0 mm	3,5 - 5,5 mm	21501 48100			250	2500
4,8 x 12,0 mm	5,5 - 6,5 mm	21501 48120			250	2500
4,8 x 12,5 mm	5,5 - 7,0 mm	21501 48125			250	2500
4,8 x 16,0 mm	6,5 - 10,5 mm	21501 48160			250	2500
4,8 x 20,0 mm	10,5 - 14,0 mm	21501 48200			250	2500