

## SECHSKANT-BOHRSCHRAUBEN


MIT LÄNGSSCHLITZ - ANGEPRESSTER BUND

## HEXAGON WASHER HEAD SELF DRILLING SCREWS

WITH SLOT

## VIS AUTOFOREUSE-TÊTE HEXAGONALE

AVEC FENTE - EMBASE CYLINDRIQUE

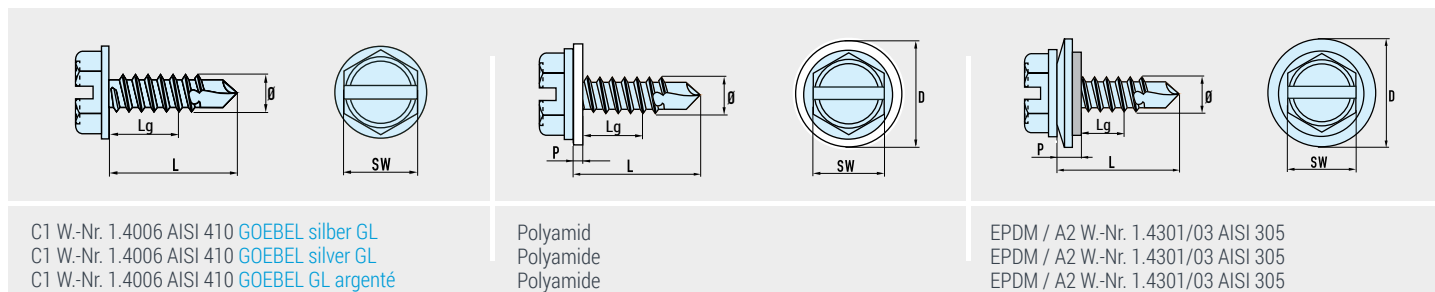

C1 W.-Nr. 1.4006 AISI 410 [GOEBEL silber GL](#)  
 C1 W.-Nr. 1.4006 AISI 410 [GOEBEL silver GL](#)  
 C1 W.-Nr. 1.4006 AISI 410 [GOEBEL GL argenté](#)

Polyamid  
 Polyamide  
 Polyamide

EPDM / A2 W.-Nr. 1.4301/03 AISI 305  
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305  
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305

### Ø 4,2 mm

SW = 7 mm



UPM/RPM/TR-MIN = max. 1200

Ø	L	LG min	CODE	P	D	LG min	CODE	P	D	LG min	CODE
4,2	13 mm	4,3 mm	1000 <a href="#">40661 42130</a>	2,0 mm	10,0 mm	3,3 mm	1000 <a href="#">40622 42130</a>	3,0 mm	12,0 mm	2,8 mm	500 <a href="#">40624 42130</a>
	16 mm	7,3 mm	1000 <a href="#">40661 42160</a>	2,0 mm	10,0 mm	6,3 mm	500 <a href="#">40622 42160</a>	3,0 mm	12,0 mm	5,8 mm	500 <a href="#">40624 42160</a>
	19 mm	10,3 mm	1000 <a href="#">40611 42190</a>	2,0 mm	10,0 mm	9,3 mm	500 <a href="#">40622 42190</a>	3,0 mm	12,0 mm	8,8 mm	500 <a href="#">40624 42190</a>

### Ø 4,8 mm

SW = 8 mm



UPM/RPM/TR-MIN = max. 1200

4,8	16 mm	5,8 mm	500 <a href="#">40661 48160</a>	2,0 mm	10,0 mm	4,8 mm	500 <a href="#">40622 48160</a>	3,0 mm	12,0 mm	4,3 mm	500 <a href="#">40624 48160</a>
	19 mm	8,7 mm	500 <a href="#">40661 48190</a>	2,0 mm	10,0 mm	7,7 mm	500 <a href="#">40622 48190</a>	3,0 mm	12,0 mm	7,2 mm	500 <a href="#">40624 48190</a>
	25 mm	14,7 mm	500 <a href="#">40661 48250</a>	2,0 mm	10,0 mm	13,7 mm	500 <a href="#">40622 48250</a>	3,0 mm	12,0 mm	13,2 mm	500 <a href="#">40624 48250</a>

Ø x L	Slot	Material
4,2 x 13 mm	2 x 0,8 mm	max. 3,0 mm
4,2 x 16 mm	2 x 0,8 mm	max. 3,0 mm
4,2 x 19 mm	2 x 0,8 mm	max. 3,0 mm
4,8 x 16 mm	2 x 1,0 mm	max. 4,4 mm
4,8 x 19 mm	2 x 1,0 mm	max. 4,4 mm
4,8 x 25 mm	2 x 1,0 mm	max. 4,4 mm