

# DIN 7504 M

## LINSENKOPF-BOHRSCHRAUBEN


MIT KREUZSCHLITZ (H-PHILLIPS)

## PAN HEAD SELF DRILLING SCREWS

WITH CROSS RECESSED (H-PHILLIPS)

## VIS AUTOFOREUSE-TÊTE CYLINDRIQUE BOMBÉE

EMPREINTE CRUCIFORME (H-PHILLIPS)

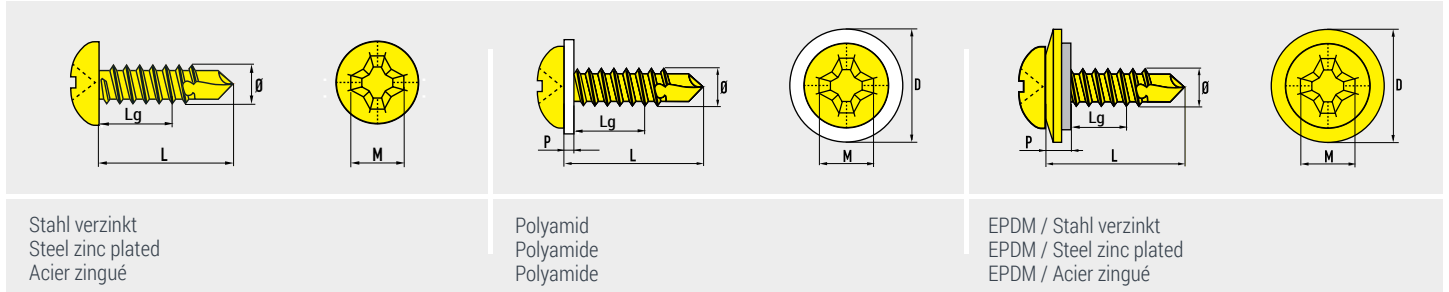

Ø 4,2 mm	M = No. 2	UPM/RPM/TR-MIN = 1800 - 2500	Polyamid				EPDM / Stahl verzinkt								
			LG min	CODE	P	D	LG min	CODE	P	D					
4,2 x 13 mm			4,3 mm	1000	41101 42130	2,0 mm	10,0 mm	3,3 mm	1000	41102 42130	3,0 mm	12,0 mm	2,8 mm	500	41103 42130
4,2 x 16 mm			7,3 mm	1000	41101 42160	2,0 mm	10,0 mm	6,3 mm	500	41102 42160	3,0 mm	12,0 mm	5,8 mm	500	41103 42160
4,2 x 19 mm			10,3 mm	1000	41101 42190	2,0 mm	10,0 mm	9,3 mm	500	41102 42190	3,0 mm	12,0 mm	8,8 mm	500	41103 42190
4,2 x 25 mm			16,3 mm	500	41101 42250	2,0 mm	10,0 mm	15,3 mm	500	41102 42250	3,0 mm	12,0 mm	14,8 mm	250	41103 42250
4,2 x 32 mm			23,0 mm	500	41101 42320	2,0 mm	10,0 mm	22,0 mm	250	41102 42320	3,0 mm	12,0 mm	21,5 mm	250	41103 42320
Ø 4,8 mm	M = No. 2	UPM/RPM/TR-MIN = 1800 - 2500	Polyamid				EPDM / Stahl verzinkt								
4,8 x 13 mm			3,7 mm	1000	41101 48130	2,0 mm	10,0 mm	2,7 mm	1000	41102 48130	3,0 mm	12,0 mm	2,2 mm	500	41103 48130
4,8 x 16 mm			5,8 mm	1000	41101 48160	2,0 mm	10,0 mm	4,8 mm	500	41102 48160	3,0 mm	12,0 mm	4,3 mm	500	41103 48160
4,8 x 19 mm			8,7 mm	1000	41101 48190	2,0 mm	10,0 mm	7,7 mm	500	41102 48190	3,0 mm	12,0 mm	7,2 mm	500	41103 48190
4,8 x 22 mm			11,7 mm	500	41101 48220	2,0 mm	10,0 mm	10,7 mm	250	41102 48220	3,0 mm	12,0 mm	10,2 mm	250	41103 48220
4,8 x 25 mm			14,7 mm	500	41101 48250	2,0 mm	10,0 mm	13,7 mm	250	41102 48250	3,0 mm	12,0 mm	13,2 mm	250	41103 48250
4,8 x 32 mm			21,5 mm	500	41101 48320	2,0 mm	10,0 mm	20,5 mm	250	41102 48320	3,0 mm	12,0 mm	20,0 mm	250	41103 48320
4,8 x 38 mm			27,5 mm	250	41101 48380	2,0 mm	10,0 mm	26,5 mm	250	41102 48380	3,0 mm	12,0 mm	26,0 mm	250	41103 48380
4,8 x 45 mm			34,5 mm	250	41101 48450	2,0 mm	10,0 mm	33,5 mm	250	41102 48450	3,0 mm	12,0 mm	33,0 mm	250	41103 48450
4,8 x 50 mm			39,5 mm	250	41101 48500	2,0 mm	10,0 mm	38,5 mm	250	41102 48500	3,0 mm	12,0 mm	38,0 mm	250	41103 48500
Ø 5,5 mm	M = No. 3	UPM/RPM/TR-MIN = 1000 - 1800	Polyamid				EPDM / Stahl verzinkt								
5,5 x 19 mm			8,0 mm	500	41101 55190	2,0 mm	11,5 mm	7,0 mm	500	41102 55190	3,0 mm	16,0 mm	6,5 mm	500	41103 55190
5,5 x 25 mm			14,0 mm	500	41101 55250	2,0 mm	11,5 mm	13,0 mm	250	41102 55250	3,0 mm	16,0 mm	12,5 mm	500	41103 55250
5,5 x 32 mm			21,0 mm	500	41101 55320	2,0 mm	11,5 mm	20,0 mm	250	41102 55320	3,0 mm	16,0 mm	19,5 mm	500	41103 55320
5,5 x 38 mm			27,0 mm	500	41101 55380	2,0 mm	11,5 mm	26,0 mm	250	41102 55380	3,0 mm	16,0 mm	25,5 mm	500	41103 55380
5,5 x 45 mm			34,0 mm	500	41101 55450	2,0 mm	11,5 mm	33,0 mm	250	41102 55450	3,0 mm	16,0 mm	32,5 mm	500	41103 55450
5,5 x 50 mm			39,0 mm	500	41101 55500	2,0 mm	11,5 mm	38,0 mm	250	41102 55500	3,0 mm	16,0 mm	37,5 mm	500	41103 55500
Ø 6,3 mm	M = No. 3	UPM/RPM/TR-MIN = 1000 - 1800	Polyamid				EPDM / Stahl verzinkt								
6,3 x 19 mm			7,0 mm	500	41101 63190	2,0 mm	15,5 mm	6,0 mm	500	41102 63190	3,0 mm	16,0 mm	5,5 mm	500	41103 63190
6,3 x 25 mm			13,0 mm	500	41101 63250	2,0 mm	15,5 mm	12,0 mm	250	41102 63250	3,0 mm	16,0 mm	11,5 mm	500	41103 63250
6,3 x 32 mm			20,0 mm	500	41101 63320	2,0 mm	15,5 mm	19,0 mm	250	41102 63320	3,0 mm	16,0 mm	18,5 mm	500	41103 63320
6,3 x 38 mm			26,0 mm	500	41101 63380	2,0 mm	15,5 mm	25,0 mm	250	41102 63380	3,0 mm	16,0 mm	24,5 mm	500	41103 63380
6,3 x 45 mm			33,0 mm	500	41101 63450	2,0 mm	15,5 mm	32,0 mm	250	41102 63450	3,0 mm	16,0 mm	31,5 mm	500	41103 63450
6,3 x 50 mm			38,0 mm	500	41101 63500	2,0 mm	15,5 mm	37,0 mm	250	41102 63500	3,0 mm	16,0 mm	36,5 mm	500	41103 63500

Änderungen vorbehalten Subject to modifications Sous réserve de modifications