

DIN 7504 SQ

LINSENKOPF-BOHRSCHRAUBEN (SQ)

MIT INNENVIERKANT UND LÄNGSSCHLITZ - GEHÄRTETE BOHRSPITZE

PAN HEAD SELF DRILLING SCREWS (SQ)


WITH SQUARE SOCKET IN HEAD AND SLOT - WITH HARDENED DRILLING POINT

VIS AUTOFREUSE-TÊTE CYLINDRIQUE BOMBÉE (SQ)

EMPREINTE CARRÉE AVEC FENTE - POINTE FOREUSE RENFORCÉE



Inklusive
including
inclusive

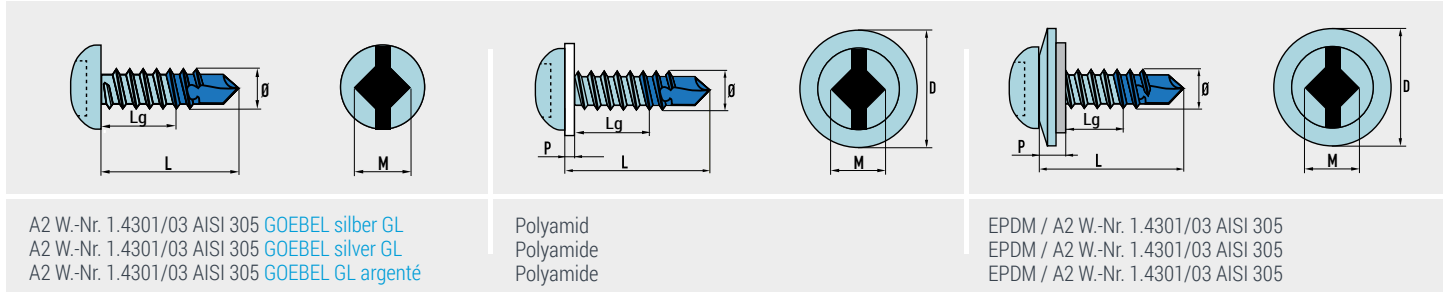

A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silber GL
A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silver GL
A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL GL argenté

Polyamid
Polyamide
Polyamide

EPDM / A2 W.-Nr. 1.4301/03 AISI 305
EPDM / A2 W.-Nr. 1.4301/03 AISI 305
EPDM / A2 W.-Nr. 1.4301/03 AISI 305

Ø 4,2 mm

M = No. 2



UPM/RPM/TR-MIN = max. 1200

	LG min	CODE	P	D	LG min	CODE	P	D	LG min	CODE
4,2 x 16 mm	7,0 mm	1000 66610 42160	2,0 mm	12,0 mm	6,0 mm	1000 69902 42160	3,0 mm	12,0 mm	5,5 mm	500 69910 42160
4,2 x 19 mm	8,5 mm	1000 66610 42190	2,0 mm	12,0 mm	7,5 mm	1000 69902 42190	3,0 mm	12,0 mm	7,0 mm	500 69910 42190

Ø 4,8 mm

M = No. 2



UPM/RPM/TR-MIN = max. 1200

4,8 x 16 mm	7,0 mm	500 66610 48160	2,0 mm	12,0 mm	6,0 mm	500 69902 48160	3,0 mm	12,0 mm	5,5 mm	500 69910 48160
4,8 x 19 mm	7,0 mm	500 66610 48190	2,0 mm	12,0 mm	6,0 mm	500 69902 48190	3,0 mm	12,0 mm	5,5 mm	500 69910 48190
4,8 x 25 mm	13,0 mm	500 66610 48250	2,0 mm	12,0 mm	12,0 mm	500 69902 48250	3,0 mm	12,0 mm	11,5 mm	500 69910 48250

	A2/A4	Stahl Steel Acier
4,2 x 16 mm	2 x 0,8 mm	max. 2,5 mm
4,2 x 19 mm	2 x 0,8 mm	max. 3,2 mm
4,8 x 16 mm	2 x 1,0 mm	max. 4,5 mm
4,8 x 19 mm	2 x 1,0 mm	max. 4,5 mm
4,8 x 25 mm	2 x 1,0 mm	max. 4,5 mm



Die - ausgezeichnete - Lösung zur Verschraubung von Edelstahlblechen.
The - Award Winning - Solution to the Fastening of Stainless Steel Sheets.
La solution idéale les fixations de tôles en inox.