

## BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15979)

## BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15979)

## RIVETS AVEUGLES

TÊTE PLATE (~ DIN EN ISO 15979)

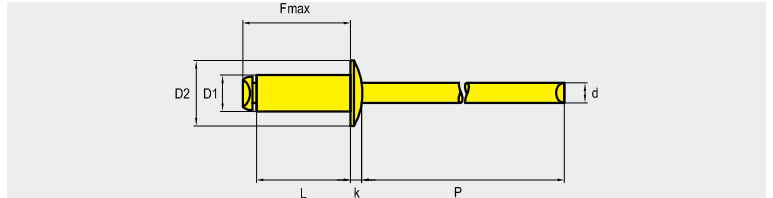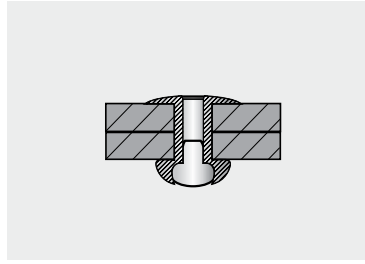

Stahl verzinkt  
Steel zinc plated  
Acier zingué

Stahl verzinkt  
Steel zinc plated  
Acier zingué

### Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm

D2 = 8,0 + 0 / - 1,0 mm

k = 1,0 + / - 0,3 mm

d = 2,5 mm

P ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

4,1 mm

|               | F-Max   |                | CODE        |        |        |      |       |
|---------------|---------|----------------|-------------|--------|--------|------|-------|
| 4,0 x 6,0 mm  | 10,9 mm | 0,5 - 2,5 mm   | 70801 40600 | 1550 N | 1990 N | 1000 | 10000 |
| 4,0 x 8,0 mm  | 12,9 mm | 2,5 - 4,5 mm   | 70801 40800 |        |        | 1000 | 10000 |
| 4,0 x 10,0 mm | 14,9 mm | 4,5 - 6,5 mm   | 70801 40100 |        |        | 1000 | 10000 |
| 4,0 x 12,0 mm | 16,9 mm | 6,5 - 8,5 mm   | 70801 40120 |        |        | 1000 | 10000 |
| 4,0 x 14,0 mm | 18,9 mm | 8,5 - 10,5 mm  | 70801 40140 |        |        | 500  | 5000  |
| 4,0 x 16,0 mm | 20,9 mm | 10,5 - 12,5 mm | 70801 40160 |        |        | 500  | 5000  |
| 4,0 x 18,0 mm | 22,9 mm | 12,5 - 14,5 mm | 70801 40180 |        |        | 500  | 5000  |
| 4,0 x 20,0 mm | 24,9 mm | 14,5 - 16,5 mm | 70801 40200 |        |        | 500  | 5000  |
| 4,0 x 22,0 mm | 26,9 mm | 15,5 - 17,5 mm | 70801 40220 |        |        | 500  | 5000  |
| 4,0 x 24,0 mm | 28,9 mm | 17,5 - 19,5 mm | 70801 40240 |        |        | 500  | 5000  |
| 4,0 x 25,0 mm | 29,9 mm | 18,5 - 20,5 mm | 70801 40250 |        |        | 500  | 5000  |
| 4,0 x 26,0 mm | 30,9 mm | 19,5 - 21,5 mm | 70801 40260 |        |        | 500  | 5000  |
| 4,0 x 30,0 mm | 34,9 mm | 20,0 - 25,0 mm | 70801 40300 |        |        | 500  | 5000  |

### Ø 4,8 mm

D1 = 4,8 + 0,08 / - 0,15 mm

D2 = 9,5 + 0 / - 1,0 mm

k = 1,1 + / - 0,3 mm

d = 2,9 mm

P ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

4,9 mm

|               | F-Max   |                | CODE        |        |        |     |      |
|---------------|---------|----------------|-------------|--------|--------|-----|------|
| 4,8 x 6,0 mm  | 11,4 mm | 1,0 - 2,5 mm   | 70801 48060 | 2300 N | 2920 N | 500 | 5000 |
| 4,8 x 8,0 mm  | 13,4 mm | 2,5 - 4,5 mm   | 70801 48080 |        |        | 500 | 5000 |
| 4,8 x 10,0 mm | 15,4 mm | 4,5 - 6,0 mm   | 70801 48100 |        |        | 500 | 5000 |
| 4,8 x 12,0 mm | 17,4 mm | 6,0 - 8,0 mm   | 70801 48120 |        |        | 500 | 5000 |
| 4,8 x 14,0 mm | 19,4 mm | 8,0 - 10,0 mm  | 70801 48140 |        |        | 500 | 5000 |
| 4,8 x 16,0 mm | 21,4 mm | 10,0 - 11,5 mm | 70801 48160 |        |        | 500 | 5000 |
| 4,8 x 18,0 mm | 23,4 mm | 11,5 - 13,5 mm | 70801 48180 |        |        | 500 | 5000 |
| 4,8 x 20,0 mm | 25,4 mm | 13,5 - 15,0 mm | 70801 48200 |        |        | 500 | 5000 |
| 4,8 x 22,0 mm | 27,4 mm | 15,0 - 17,0 mm | 70801 48220 |        |        | 500 | 5000 |
| 4,8 x 25,0 mm | 30,4 mm | 17,0 - 20,0 mm | 70801 48250 |        |        | 250 | 2500 |
| 4,8 x 30,0 mm | 35,4 mm | 20,0 - 25,0 mm | 70801 48300 |        |        | 250 | 2500 |
| 4,8 x 35,0 mm | 40,4 mm | 25,0 - 30,0 mm | 70801 48351 |        |        | 250 | 2500 |
| 4,8 x 40,0 mm | 45,4 mm | 30,0 - 35,0 mm | 70801 48400 |        |        | 250 | 2500 |