

Sechskant-Bohrschrauben


mit Längsschlitz - angepreßter Bund

Hexagon washer head self drilling screws

with slot

Vis autoforeuse-tête hexagonale

avec fente - embase cylindrique

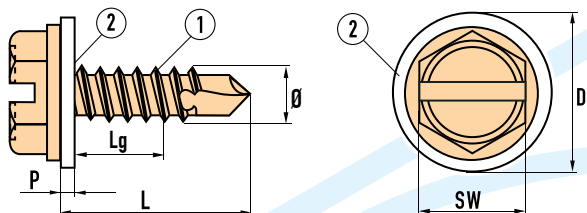

- 1 Stahl verzinkt **GOEBEL silber GL**
Steel zinc plated **GOEBEL silver GL**
Acier zingué **GOEBEL GL argenté**
- 2 Polyamid
Polyamide
Polyamide

Ø 4,2 mm

SW = 7 mm

P = 2,0 mm

D = 10,0 mm

= C

= max. 3,0 mm

UPM / RPM / TR-MN = 1800 - 2500

	Lg min			
4,2 x 13 mm	3,3 mm	7 mm	1000	40202 42 130
4,2 x 16 mm	6,3 mm	7 mm	500	40202 42 160
4,2 x 19 mm	9,3 mm	7 mm	500	40202 42 190
4,2 x 22 mm	12,3 mm	7 mm	500	40202 42 220
4,2 x 25 mm	15,3 mm	7 mm	500	40102 42 250
4,2 x 32 mm	22,0 mm	7 mm	250	40102 42 320
4,2 x 38 mm	28,0 mm	7 mm	250	40102 42 380

Ø 4,8 mm

SW = 8 mm

P = 2,0 mm

D = 10,0 mm

= C

= max. 4,4 mm

UPM / RPM / TR-MN = 1800 - 2500

	Lg min			
4,8 x 13 mm	2,7 mm	8 mm	1000	40202 48 130
4,8 x 16 mm	4,8 mm	8 mm	500	40202 48 160
4,8 x 19 mm	7,7 mm	8 mm	500	40202 48 190
4,8 x 22 mm	10,7 mm	8 mm	250	40202 48 220
4,8 x 25 mm	13,7 mm	8 mm	250	40202 48 250
4,8 x 32 mm	20,5 mm	8 mm	250	40202 48 320
4,8 x 38 mm	26,5 mm	8 mm	250	40202 48 380

Ø 5,5 mm

SW = 8 mm

P = 2,0 mm

D = 11,0 mm

= C

= max. 5,25 mm

UPM / RPM / TR-MN = 1000 - 1800

	Lg min			
5,5 x 19 mm	7,0 mm	8 mm	500	40202 55 190
5,5 x 25 mm	13,0 mm	8 mm	500	40202 55 250

Ø 6,3 mm

SW = 10 mm

P = 2,0 mm

D = 15,5 mm

= C

= max. 6,0 mm

UPM / RPM / TR-MN = 1000 - 1800

	Lg min			
6,3 x 19 mm	6,0 mm	10 mm	500	40202 63 190
6,3 x 25 mm	12,0 mm	10 mm	500	40202 63 250