

SECHSKANT-BOHRSCHRAUBEN


ANGEPRESSTER BUND MIT SPERRVERZÄHNUNG

HEXAGON WASHER HEAD SELF DRILLING SCREWS

WITH LOCKING SERRATION UNDER HEAD

VIS AUTOFOREUSE-TÊTE HEXAGONALE

EMBASE CYLINDRIQUE, CRANTAGE SOUS TÊTE

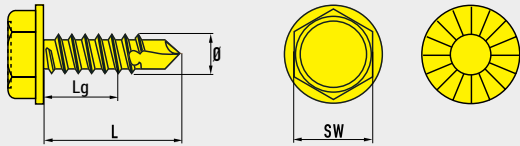

Stahl verzinkt
Steel zinc plated
Acier zingué

Ø 4,2 mm

SW = 1/4"

= C

= max. 3,0 mm

UPM/RPM/TR-MIN = 1800 - 2500

		LG min		CODE
	4,2 x 13 mm	4,3 mm	1000	40104 42130
	4,2 x 16 mm	7,3 mm	1000	40104 42160
	4,2 x 19 mm	10,3 mm	1000	40104 42190
	4,2 x 25 mm	16,3 mm	500	40104 42250
	4,2 x 32 mm	23,0 mm	500	40104 42320
	4,2 x 38 mm	29,0 mm	500	40104 42380

Ø 4,8 mm

SW = 8 mm

= C

= max. 4,4 mm

UPM/RPM/TR-MIN = 1800 - 2500

	4,8 x 13 mm	3,7 mm	1000	40104 48130
	4,8 x 16 mm	5,8 mm	1000	40104 48160
	4,8 x 19 mm	8,7 mm	1000	40104 48190
	4,8 x 25 mm	14,7 mm	500	40104 48250
	4,8 x 32 mm	21,5 mm	500	40104 48320
	4,8 x 38 mm	27,5 mm	250	40104 48380
	4,8 x 45 mm	34,5 mm	250	40104 48450
	4,8 x 50 mm	39,5 mm	250	40104 48500

Ø 5,5 mm

SW = 8 mm

= C

= max. 5,25 mm

UPM/RPM/TR-MIN = 1000 - 1800

	5,5 x 19 mm	8,0 mm	250	40104 55190
	5,5 x 25 mm	14,0 mm	250	40104 55250
	5,5 x 32 mm	21,0 mm	250	40104 55320
	5,5 x 38 mm	27,0 mm	250	40104 55380
	5,5 x 45 mm	34,0 mm	250	40104 55450
	5,5 x 50 mm	39,0 mm	250	40104 55500

Ø 6,3 mm

SW = 10 mm

= C

= max. 6,0 mm

UPM/RPM/TR-MIN = 1000 - 1800

	6,3 x 19 mm	7,0 mm	500	40104 63190
	6,3 x 25 mm	13,0 mm	500	40104 63250
	6,3 x 32 mm	20,0 mm	500	40104 63320
	6,3 x 38 mm	26,0 mm	500	40104 63380
	6,3 x 45 mm	33,0 mm	500	40104 63450
	6,3 x 50 mm	38,0 mm	500	40104 63500

Änderungen vorbehalten Subject to modifications Sous réserve de modifications