

## BLINDNIETE



FLACHRUNDKOPF MIT GERILLTEM NIETDORN (~ DIN EN ISO 15983)

## BLIND RIVETS

DOMED HEAD WITH GROOVED MANDREL (~ DIN EN ISO 15983)

## RIVETS AVEUGLES


TÊTE PLATE AVEC CLOU CANNÉLÉ (~ DIN EN ISO 15983)

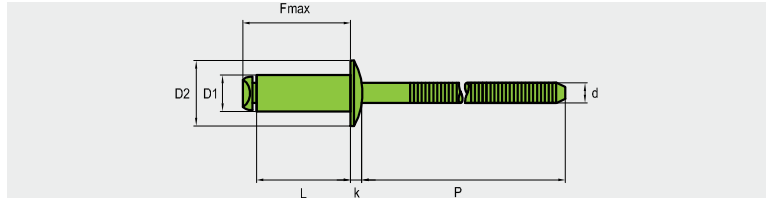
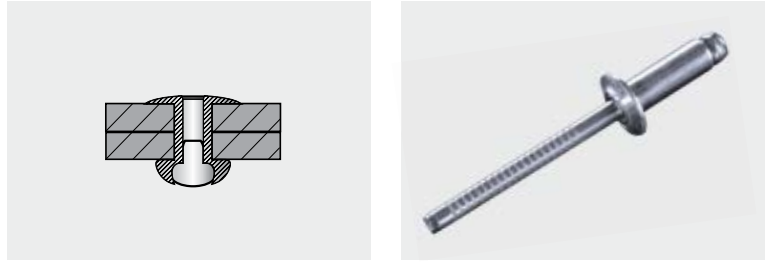






Edelstahl A2 [ 1.4301 ]  
Stainless steel A2 [ AISI 304 ]  
Acier inox A2 [ 1.4301 ]


Edelstahl A2 [ 1.4301 ]  
Stainless steel A2 [ AISI 304 ]  
Acier inox A2 [ 1.4301 ]







### Ø 6,0 mm

D1 = 6,0 + 0,08 / - 0,15 mm  
D2 = 12,0 + 0 / - 1,5 mm  
k = 1,5 +/- 0,4 mm  
d = 3,6 mm  
P ≥ 31,0 mm  
L = + 1,0 / - 0,2 mm  
 6,1 mm

|  | F-Max   |  | CODE        |  |  |  |  |
|---|---------|--|-------------|---|---|---|---|
| 6,0 x 10,0 mm   | 15,9 mm | 2,0 - 4,0 mm   | 70301 60100 | 6500 N  | 8850 N  | 250   | 2500  |
| 6,0 x 12,0 mm   | 17,9 mm | 4,0 - 6,0 mm   | 70301 60120 |   |   | 250   | 2500  |
| 6,0 x 15,0 mm   | 20,9 mm | 6,0 - 9,0 mm   | 70301 60150 |   |   | 250   | 2500  |
| 6,0 x 18,0 mm   | 23,9 mm | 9,0 - 12,0 mm  | 70301 60180 |   |   | 250   | 2500  |
| 6,0 x 20,0 mm   | 25,9 mm | 10,0 - 14,0 mm   | 70301 60200 |   |   | 250   | 2500  |
| 6,0 x 22,0 mm   | 27,9 mm | 12,0 - 16,0 mm   | 70301 60220 |   |   | 250   | 2500  |
| 6,0 x 25,0 mm   | 30,9 mm | 15,0 - 19,0 mm   | 70301 60250 |   |   | 250   | 2500  |

### Ø 6,4 mm

D1 = 6,4 + 0,08 / - 0,15 mm  
D2 = 13,0 + 0 / - 1,5 mm  
k = 1,8 +/- 0,4 mm  
d = 3,85 mm  
P ≥ 31,0 mm  
L = + 1,0 / - 0,2 mm  
 6,5 mm

|  | F-Max   |  | CODE        |  |  |  |  |
|---|---------|--|-------------|---|---|---|---|
| 6,4 x 10,0 mm   | 16,4 mm | 2,0 - 4,0 mm   | 70301 64100 | 6500 N  | 8850 N  | 250   | 2500  |
| 6,4 x 12,0 mm   | 18,4 mm | 4,0 - 6,0 mm   | 70301 64120 |   |   | 250   | 2500  |
| 6,4 x 15,0 mm   | 21,4 mm | 6,0 - 9,0 mm   | 70301 64150 |   |   | 250   | 2500  |
| 6,4 x 18,0 mm   | 24,4 mm | 9,0 - 13,0 mm  | 70301 64180 |   |   | 250   | 2500  |
| 6,4 x 20,0 mm   | 26,4 mm | 13,0 - 16,0 mm   | 70301 64200 |   |   | 250   | 2500  |
| 6,4 x 25,0 mm   | 31,4 mm | 16,0 - 20,0 mm   | 70301 64250 |   |   | 250   | 2500  |