

BLINDNIETE



SENKKOPF 120° (~ DIN EN ISO 15980)

BLIND RIVETS

COUNTERSUNK HEAD 120° (~ DIN EN ISO 15980)

RIVETS AVEUGLES

AVEUGLES TÊTE FRAISÉE 120° (~ DIN EN ISO 15980)

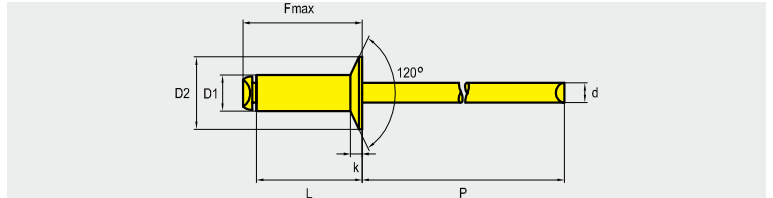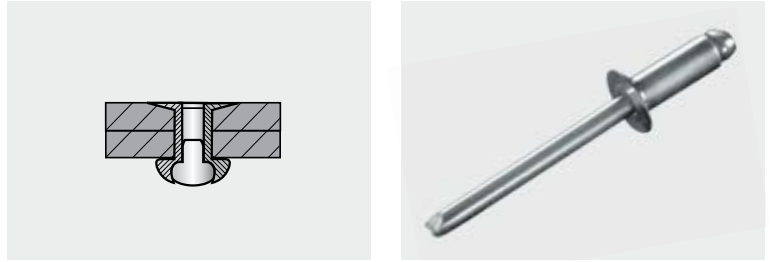

Stahl verzinkt
Steel zinc plated
Acier zingué

Stahl verzinkt
Steel zinc plated
Acier zingué

Ø 3,0 mm

D1 = 3,0 + 0,08 / - 0,1 mm

D2 = 6,0 + 0 / - 0,4 mm

k = -

d = 1,9 mm

P ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

3,1 mm

	F-Max		CODE				
3,0 x 6,0 mm	10,4 mm	1,5 - 3,0 mm	70811 30600	950 N	1125 N		
3,0 x 8,0 mm	12,4 mm	3,0 - 5,0 mm	70811 30800				
3,0 x 10,0 mm	14,4 mm	5,0 - 7,0 mm	70811 30100				
3,0 x 12,0 mm	16,4 mm	7,0 - 9,0 mm	70811 30120				

Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm

D2 = 6,0 + 0 / - 0,4 mm

k = -

d = 2,0 mm

P ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

3,3 mm

	F-Max		CODE				
3,2 x 5,5 mm	10,4 mm	1,0 - 2,5 mm	70811 32550	1060 N	1285 N		
3,2 x 6,0 mm	10,9 mm	1,5 - 3,0 mm	70811 32600				
3,2 x 8,0 mm	12,9 mm	3,0 - 5,0 mm	70811 32800				
3,2 x 10,0 mm	14,9 mm	5,0 - 7,0 mm	70811 32100				
3,2 x 12,0 mm	16,9 mm	7,0 - 9,0 mm	70811 32120				
3,2 x 14,0 mm	18,9 mm	8,0 - 11,0 mm	70811 32140				

Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm

D2 = 7,5 + 0 / - 0,5 mm

k = -

d = 2,5 mm

P ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

4,1 mm

	F-Max		CODE				
4,0 x 6,0 mm	10,9 mm	1,5 - 2,5 mm	70811 40600	1550 N	1990 N		
4,0 x 8,0 mm	12,9 mm	2,5 - 4,5 mm	70811 40800				
4,0 x 10,0 mm	14,9 mm	4,5 - 6,5 mm	70811 40100				
4,0 x 12,0 mm	16,9 mm	6,5 - 8,5 mm	70811 40120				
4,0 x 14,0 mm	18,9 mm	8,5 - 10,5 mm	70811 40140				
4,0 x 16,0 mm	20,9 mm	10,5 - 12,5 mm	70811 40160				
4,0 x 18,0 mm	22,9 mm	12,5 - 14,5 mm	70811 40180				
4,0 x 20,0 mm	24,9 mm	14,5 - 16,0 mm	70811 40200				
4,0 x 25,0 mm	29,9 mm	15,0 - 20,0 mm	70811 40250				