

BLINDNIETE

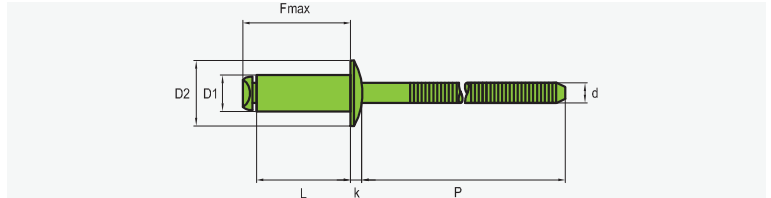
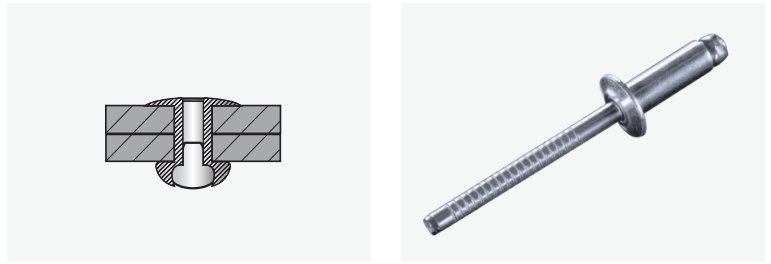
FLACHRUNDKOPF MIT GERILLEM NIETDORN (~ DIN EN ISO 15983)

BLIND RIVETS

DOMED HEAD WITH GROOVED MANDREL (~ DIN EN ISO 15983)

RIVETS AVEUGLES


TÊTE PLATE AVEC CLOU CANNÉLÉ (~ DIN EN ISO 15983)










Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]


Edelstahl A2 [1.4301]
Stainless steel A2 [AISI 304]
Acier inox A2 [1.4301]








Ø 6,0 mm

D1 = 6,0 + 0,08 / - 0,15 mm
D2 = 12,0 + 0 / - 1,5 mm
k = 1,5 +/- 0,4 mm
d = 3,6 mm
P = ≥ 31,0 mm
L = + 1,0 / - 0,2 mm
 6,1 mm

	F-Max						
6,0 x 10,0 mm	15,9 mm	2,0 - 4,0 mm	70301 60100	6500 N	8850 N	250	2500
6,0 x 12,0 mm	17,9 mm	4,0 - 6,0 mm	70301 60120			250	2500
6,0 x 15,0 mm	20,9 mm	6,0 - 9,0 mm	70301 60150			250	2500
6,0 x 18,0 mm	23,9 mm	9,0 - 12,0 mm	70301 60180			250	2500
6,0 x 20,0 mm	25,9 mm	10,0 - 14,0 mm	70301 60200			250	2500
6,0 x 25,0 mm	30,9 mm	15,0 - 19,0 mm	70301 60250			250	2500

Ø 6,4 mm

D1 = 6,4 + 0,08 / - 0,15 mm
D2 = 13,0 + 0 / - 1,5 mm
k = 1,8 +/- 0,4 mm
d = 3,85 mm
P = ≥ 31,0 mm
L = + 1,0 / - 0,2 mm
 6,5 mm

	F-Max						
6,4 x 10,0 mm	16,4 mm	2,0 - 4,0 mm	70301 64100	6500 N	8850 N	250	2500
6,4 x 12,0 mm	18,4 mm	4,0 - 6,0 mm	70301 64120			250	2500
6,4 x 15,0 mm	21,4 mm	6,0 - 9,0 mm	70301 64150			250	2500
6,4 x 18,0 mm	24,4 mm	9,0 - 13,0 mm	70301 64180			250	2500
6,4 x 20,0 mm	26,4 mm	13,0 - 16,0 mm	70301 64200			250	2500
6,4 x 25,0 mm	31,4 mm	16,0 - 20,0 mm	70301 64250			250	2500