

BLINDNIETE

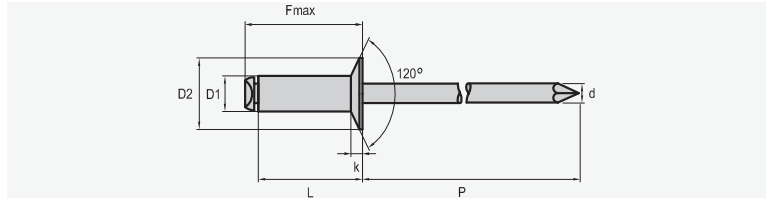
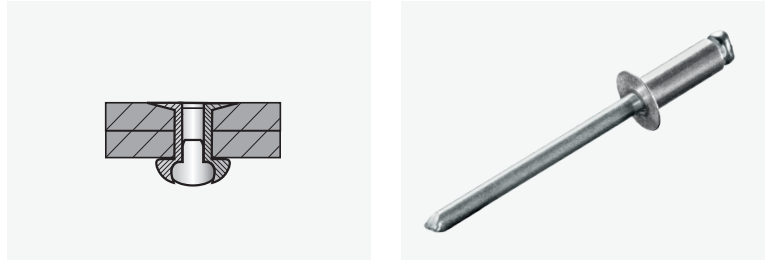
SENKKOPF 120° (~ DIN EN ISO 15982)

BLIND RIVETS

COUNTERSUNK HEAD 120° (~ DIN EN ISO 15982)

RIVETS AVEUGLES


AVEUGLES TÊTE FRAISÉE 120° (~ DIN EN ISO 15982)












Aluminium AIMG 2,5
Aluminium AIMG 2,5
Aluminium AIMG 2,5


Aluminium Legierung
Aluminium alloy
Aluminium alliage










Ø 3,0 mm

D1 = 3,0 + 0,08 / - 0,1 mm
D2 = 6,0 + 0 / - 0,4 mm
k = -
d = 1,95 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,1 mm


	F-Max						
3,0 x 6,0 mm	10,4 mm	1,5 - 3,5 mm	70705 30601	400 N	550 N		
3,0 x 8,0 mm	12,4 mm	3,5 - 5,5 mm	70705 30801				
3,0 x 10,0 mm	14,4 mm	5,5 - 7,0 mm	70705 30101				
3,0 x 12,0 mm	16,4 mm	7,0 - 9,0 mm	70705 30121				










Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm
D2 = 6,0 + 0 / - 0,4 mm
k = -
d = 1,95 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 3,3 mm


	F-Max						
3,2 x 6,0 mm	10,9 mm	1,5 - 3,5 mm	70705 32601	535 N	670 N		
3,2 x 8,0 mm	12,9 mm	3,5 - 5,0 mm	70705 32801				
3,2 x 10,0 mm	14,9 mm	5,0 - 7,0 mm	70705 32101				
3,2 x 12,0 mm	16,9 mm	7,0 - 9,0 mm	70705 32121				










Ø 4,0 mm

D1 = 4,0 + 0,08 / - 0,15 mm
D2 = 7,5 + 0 / - 0,5 mm
k = -
d = 2,1 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,1 mm

	F-Max						
4,0 x 6,0 mm	10,9 mm	1,5 - 3,0 mm	70705 40601	845 N	1025 N		
4,0 x 8,0 mm	12,9 mm	3,0 - 5,0 mm	70705 40801				
4,0 x 10,0 mm	14,9 mm	5,0 - 6,5 mm	70705 40101				
4,0 x 12,0 mm	16,9 mm	6,5 - 8,5 mm	70705 40121				
4,0 x 14,0 mm	18,9 mm	8,5 - 10,5 mm	70705 40141				
4,0 x 16,0 mm	20,9 mm	10,5 - 12,5 mm	70705 40161				

Ø 4,8 mm

D1 = 4,8 + 0,08 / - 0,15 mm
D2 = 9,0 + 0 / - 0,5 mm
k = -
d = 2,9 mm
P ≥ 27,0 mm
L = + 1,0 / - 0,2 mm
 4,9 mm

	F-Max						
4,8 x 6,0 mm	11,4 mm	1,0 - 3,5 mm	70705 48601	1150 N	1420 N		
4,8 x 8,0 mm	13,4 mm	2,0 - 4,5 mm	70705 48801				
4,8 x 10,0 mm	15,4 mm	4,5 - 6,0 mm	70705 48101				
4,8 x 12,0 mm	17,4 mm	6,0 - 8,0 mm	70705 48121				
4,8 x 14,0 mm	19,4 mm	8,0 - 10,0 mm	70705 48141				
4,8 x 16,0 mm	21,4 mm	10,0 - 12,0 mm	70705 48162				
4,8 x 18,0 mm	23,4 mm	12,0 - 14,0 mm	70705 48181				
4,8 x 20,0 mm	25,4 mm	14,0 - 16,0 mm	70705 48201				
4,8 x 25,0 mm	30,4 mm	16,0 - 21,0 mm	70705 48251				