


SELF TAPPING SCREW DIN-6928 THREAD TYPE A, STRUCK SLOT INDENT, HEX WASHER HEAD (A/F 7.88~8.00) ZINC PLATED 4 μ

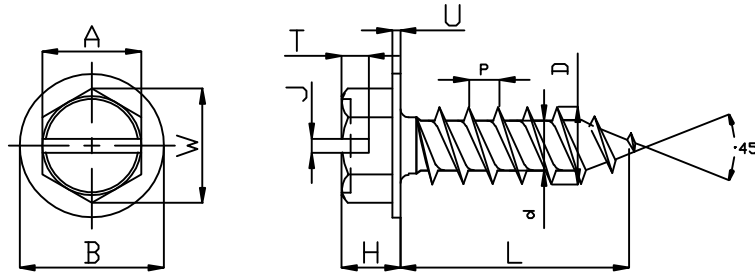

Unit: mm

| ITEM | SIZE | M4.8-1.4x16 | | | |
|--------------------|------------|-------------|---------------|-----------|--|
| ACROSS FLATS (A) | 7.88~8.00 | | MAJOR DIA (D) | 4.62~4.80 | |
| ACROSS CORNERS (W) | 8,71 Min. | | MINOR DIA (d) | 3,43~3.58 | |
| HEAD HIGH (H) | 4.15~4.45 | | PITCH (P) | 2.25 Ref. | |
| WASHER DIA. (B) | 9,80~10,50 | | | | |
| WASHER THK. (U) | 0.90 Min | | | | |
| SLOT WIDTH (J) | 1.26~1.51 | | | | |
| SLOT DEPTH (T) | 1.40~1.80 | | | | |
| | | | | | |

| | |
|------------|----------------|
| LENGTH (L) | 15.20~16.80 mm |
|------------|----------------|

| MECHANICAL PROPERTY | MATERIAL | SURFACE HARDNESS | CORE HARDNESS | BREAKING TORQUE | CASE DEPTH |
|---------------------|----------|------------------|---------------|-----------------|-------------|
| | C 1022 | HV450 Min | HV270-390 | 66kg-cmMin | 0.10~0.23mm |

customer Nr.: production Nr.: Tolerances according to ISO 4759-1, all dimensions in mm, Acceptance inspection according to ISO 3269

drawn G. Kramme checked M. Weyand approved by - date M. Goebel Name of file 2015148163 date 12.11.2010 scale no scale

GOEBEL GMBH

2015148163

715 DRAWING Nr.: Version REV0 paper 1/1